


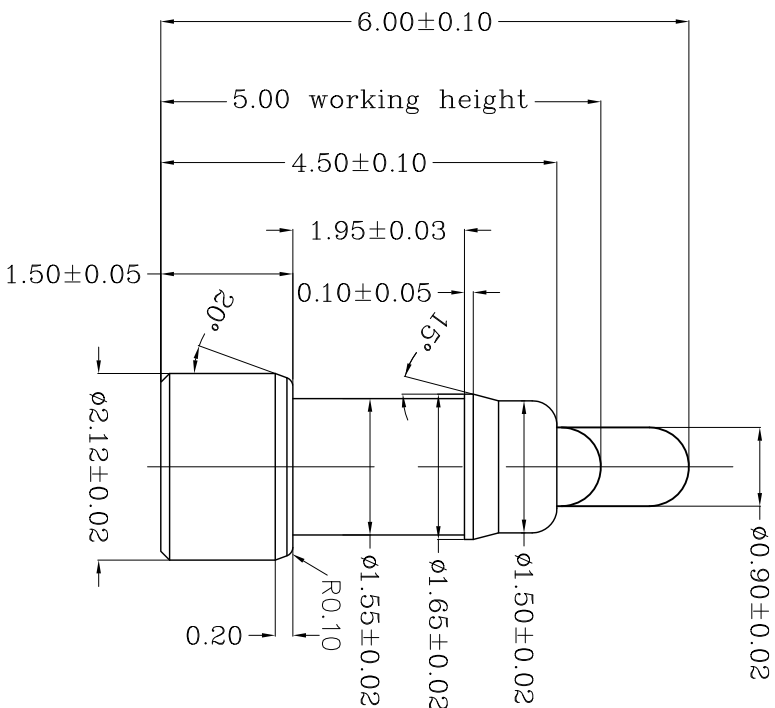

Notes:
Material:

- 1) Body : CuZn36 Pb3 (C36000)
- 2) Plunger: CuZn36,PB3(C36000) or CuZn30 or CuZn35
- 3) Spring : Stainless steel wire

Plating


- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

Mechanical

- 1) Total stroke : 1.4mm
- 2) Durability: Min 1000 Cycle

Electrical

Contact resistance: 20 mOhm max at working height after 5 cycles

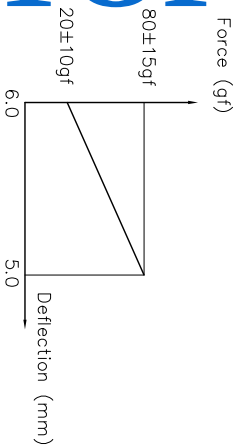

TOP-LINK

LOC	-
DIST	-

更新图画	2009/10/09		
更新图画	2009/05/21		
NEW	2008/10/17		
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				
0	= ±			
0.0	= ±0.15			
0.00	= ±0.10			
0.000	= ±			
ANGLE: ±1°				
SURF TEXTURE: 32/				
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				
MATL		HT TR	FIN	
DWN		APVD		
Qin		Lansing		
CHK		REL		
Leo				
NAME		POGO PIN		
SCALE		PG-2.1-1.5-1.5-4.5-6.0		
1:1	A4	DWG NO.	C-101282	
		SHEET	1 OF 1	REV B1

101282-1
PART NUMBER

USED ON