


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101360


LDC	-
DIST	-

4

3

2

1

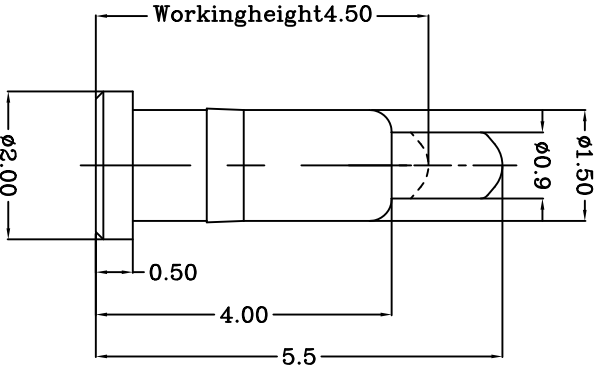

TOP-LINK

Notes:
Material(材质):

- 1)Body : C36000
- 2)Plunge : C36000 or C27000
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3)Mechanical(机械性能):
 - 1)Force: 30±15gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 30±15gf)
 - 2)Total stroke(总行程) : 1.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

USED ON

-

101360-1

PART NUMBER

MATL		HT TR	—	FIN	—
DWN	HE	APVD			
CHK		REL			

Top-Link
Electronics Ltd.

NAME

PGGD PIN
PG-2.0-0.5-1.5-4.0-5.5

SCALE	A4	DWG NO.	C-101360	SHEET	1 OF 1	REV	B
1:1							

DIMENSIONS IN MM	2010/09/08
TOLERANCES UNLESS	
OTHER SPECIFIED	
0	
= ± -	
0.0	
= ±0.15	
0.00	
= ± 0.10	
0.000	
= ±	
ANGLE: ±1°	
SURF TEXTURE: 3.2/	
REMOVE BURRS, BREAK	
SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT	

Update			
NEW			

REVISION	APVD	DATE
RECORD		
L TR		