


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101501

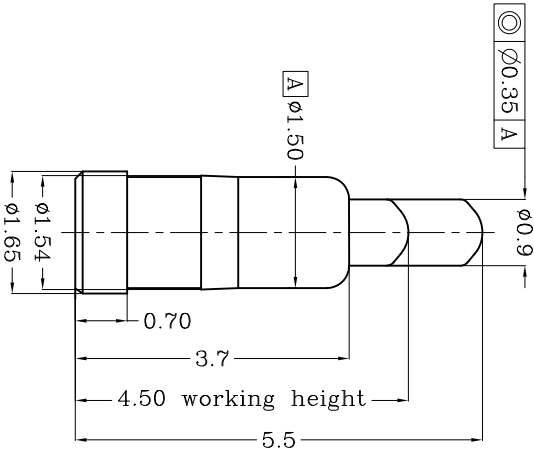


Table 1 Mechanical performance			
Working height	4.50mm	50 $\pm$ 10 gf	<2.1>
Durability	10000cycle		

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 50mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

TOP LINK

DIST

Rev.	NEW	2011/07/01
Revision record.		Date.

Top-Link Electronics Ltd.			
Type	Customer drawing	Unit	Weight
DWN: Qín zuozhòng		APVD:	<u>Top-Link Electronics</u> Top-Link Electronics Ltd.
OTHER SPECIFIED			
0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.05 Angle: ±1°		REL:	
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name POGO PIN	
Scale 1:1	Size A4	DWG No. C-101501	Page 1/1
		Rev. A	

101501-1
PART NUMBER

4

3

2

1