


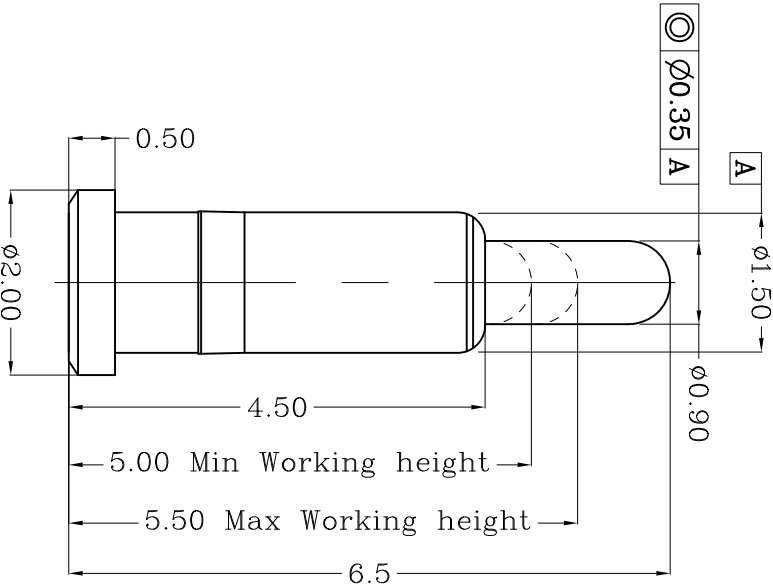

TOP-LINK

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 The force is the average of forces obtained when plunger goes downwards and upwards.
- 4 Warning:Working height are not permitted to be less than 5.00 min working height.
- 5 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
max working height	5.50mm	80gf min <2.1>
min working height	5.00mm	200gf Max
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight			
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong		APVD:						
0.0 = ± 0.15	0.00 = ± 0.10	CHK:			REL:	Top-Link Electronics					
0.000 = ± 0.005	Angle: ±1°	Name		POGO PIN							
SURF. TEXTURE: REMOVE BURRS: BREAK SHARP EDGES R0.05 MAX/DO NOT SCALE PRINT.		Scale	1:1	Size	A4	DWG No.	C-101519		Page	1/1	
		Rev.			Revision record.		Date.			Rev.	1

DIST

DIST