
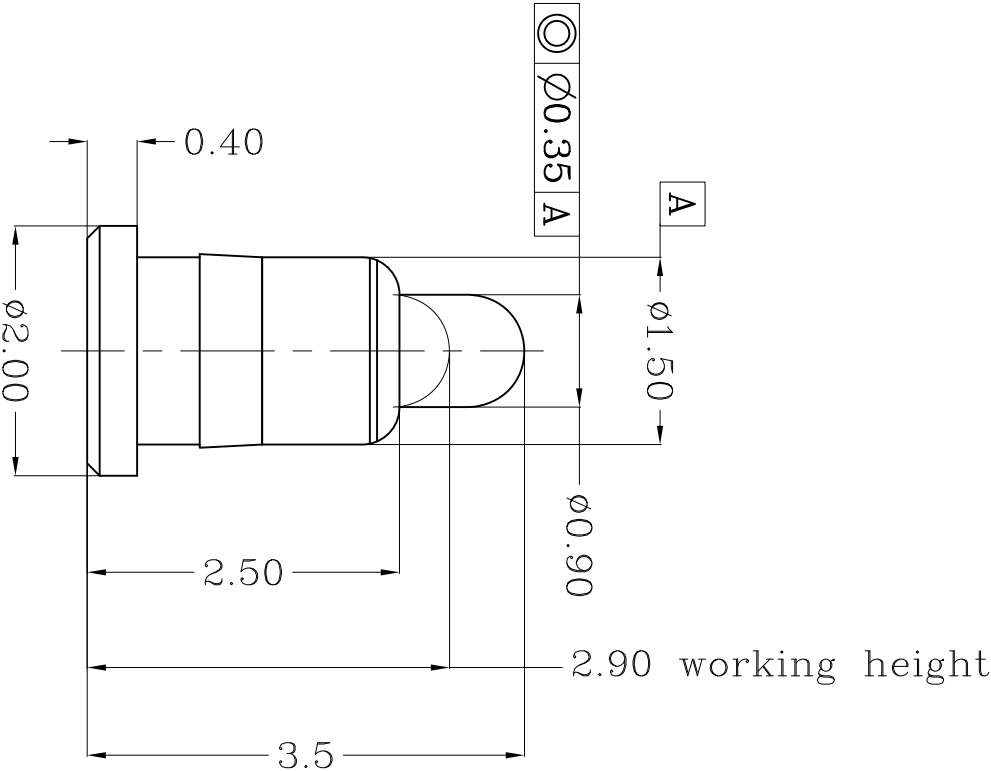




TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:30mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

Working height	2.90mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____
5				

Top-Link Electronics Ltd		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:	Top-Link Electronics Top-Link Electronics Ltd.		
0.0 = ± 0.15		Qin				
0.00 = ± 0.10		CHK:	REL:			
0.000 = ± 0.005						
Angle: ±1°						
SURF. TEXTURE:						
REMOVE SHARP EDGES						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT						
SCALE PRINT.						
Name Customer drawing						
Scale	Size	DWG No.	Page		Rev.	
1:1	A4	C-101607	1/1		2	

Name		Customer drawing		DWG No.		Page		Rev.	
Scale		Size		C-101607		1/1		2	
1:1		A4							

Top-Link
Electronics Ltd.