


proposal

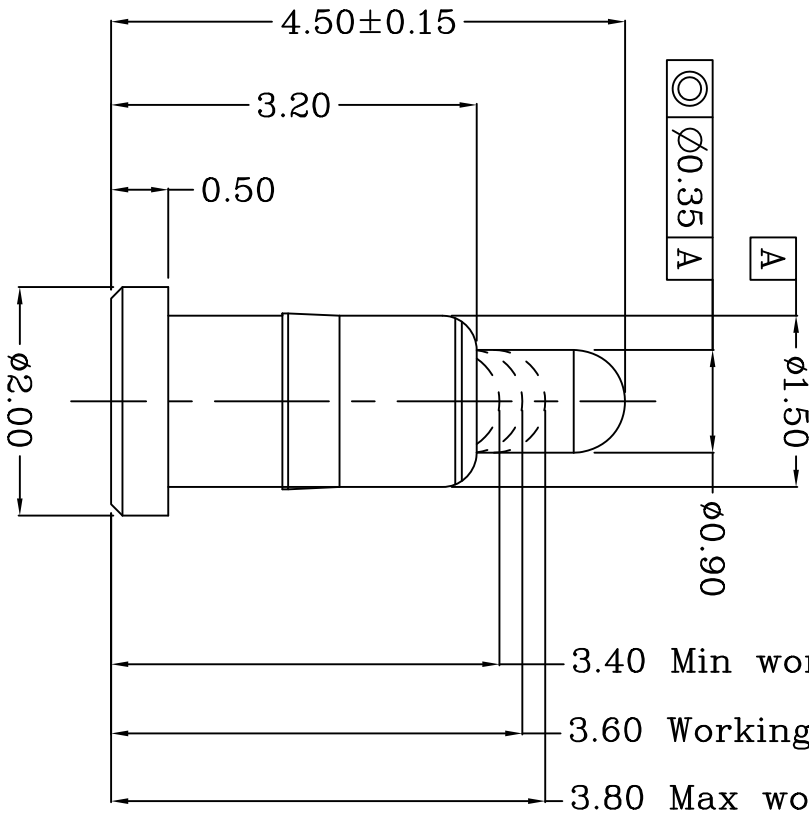

-3.40 Min working height
-3.60 Working height
-3.80 Max working height

TOP-LINK

¹ Dimensions shall be interpreted per ASME Y14.5M.

2.1>The force is the average of forces obtained when plunger

<2.2>Warning: Working height are not permitted to be less

3 Electrical performance

Resistance: 30mOhm Max.

Current rating: 2.0A

4 RoHS compliant.

Table 1 Mechanical performance		
Working height	3.60mm	80gf Min<2.1>
Durability	10000cycle	

Item	Part name	Qty/Ed	Material	Finish
1	Body	1	Leeded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leeded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	——
4				
5				

Top-Link Electronics Ltd.	Type	Unit	Weight
	Customer drawing	mm	

TOLERANCES UNLESS OTHER SPECIFIED	DWN: Cai wanlu	APVD:	 Top-Link Electronics Ltd.
0	CHK:	REL:	
± 0.15			
± 0.00			
± 0.10			

U-000=11	Name	POGO PIN	Scale	Size	DWG No.	Page	Rev.
Angle: 45°			1:1	A4	C-20101011122	1/1	1
SURF TEXTURE:							
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX DO NOT							
SCALE PRINT:							