
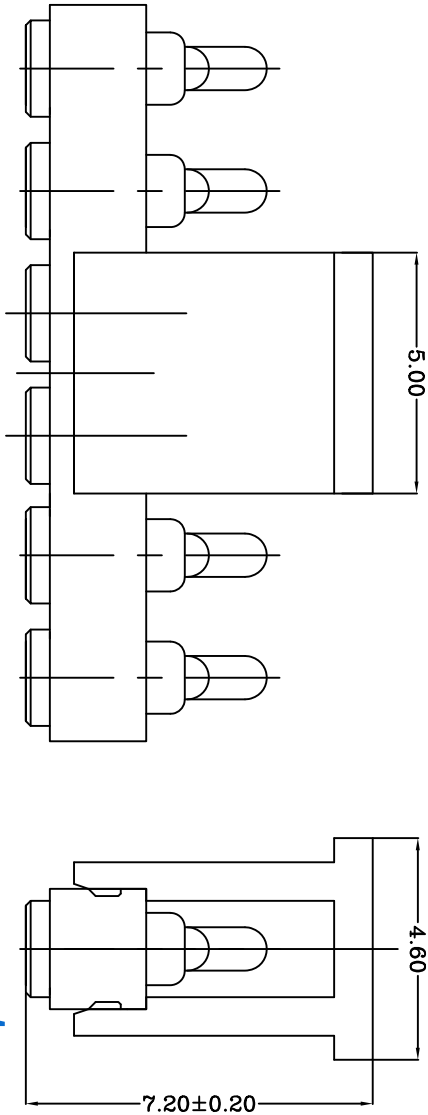



Recommended PCB Layout

Table 1 Mechanical performance		
Max.working height	4.20mm	45±10gf <2.1>
Min.working height	3.80mm	60±15gf
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

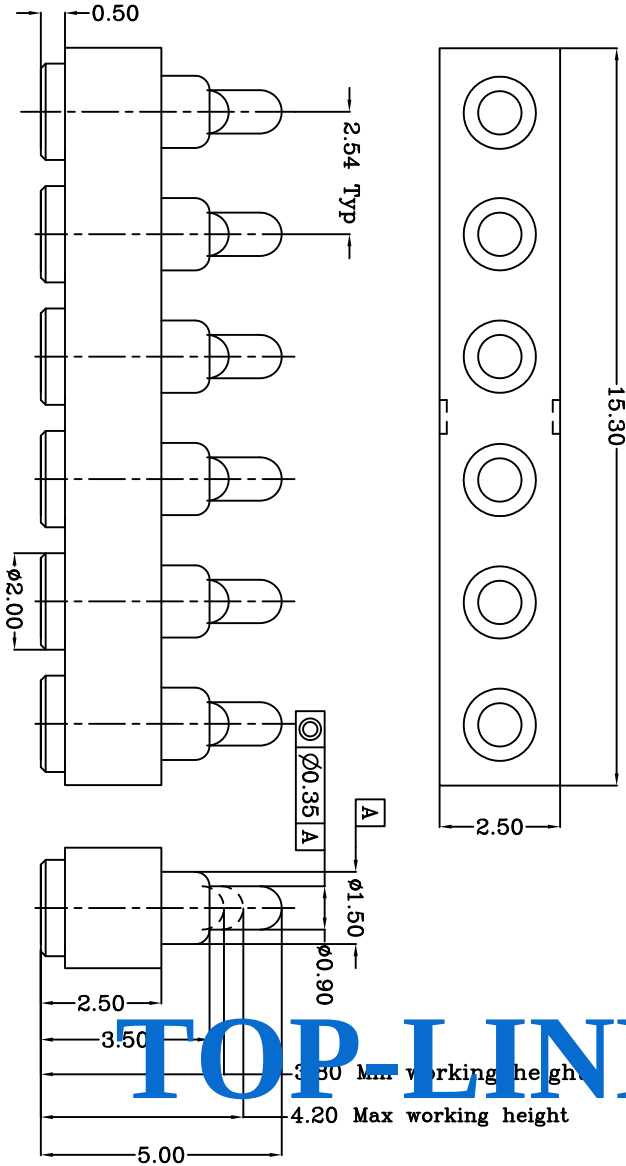

TOP-LINK

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	Top-Link Electronics Ltd.	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:				
0.0 = ±0.15		CHK:		REL:				
0.00 = ±0.10								
0.000 = ±0.001								
Angle: ±1°								
SURF. TEXTURE:								
REMOVE SHARP EDGES								
BREAK SHARP EDGES								
R0.05 MAX. DO NOT SCALE PRINT.								