






THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

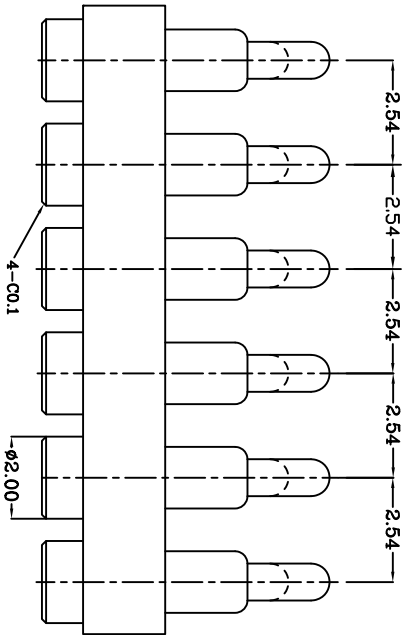



DWG NO.
C-100410

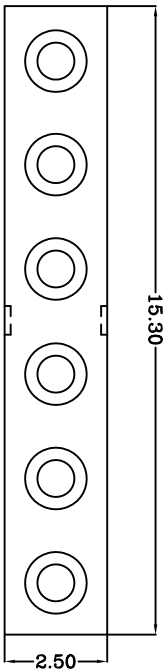

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Spring force: Min 0.15N with 0.3mm stroke.
0.75±0.25N with 1.0mm stroke.
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

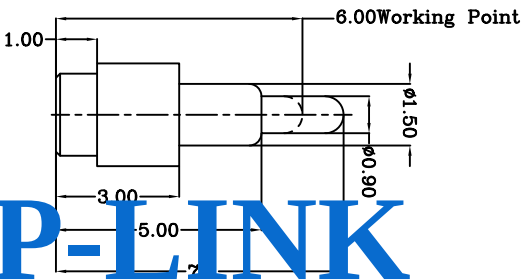

TOP-LINK

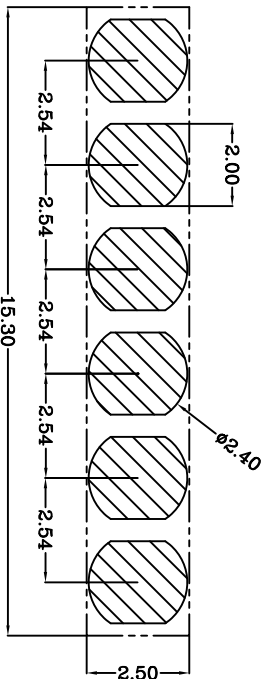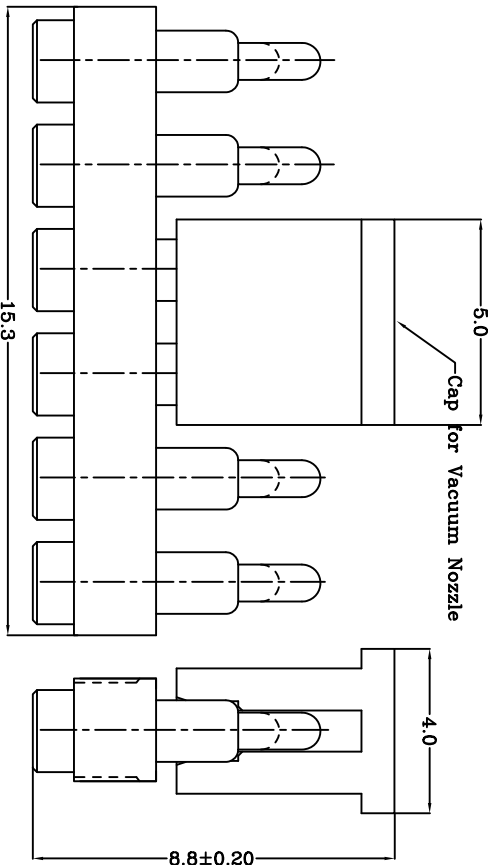

Recommended PCB Layout

LDC	-
DIST	-

LTR	REVISION	APVD	DATE
	RECORD		

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	HT TR	FIN	PART NUMBER
DWN	APVD		
CHK	REL		
Jim			
NAME	BATTERY POGO CONNECTOR 6 POSITIONS		
SCALE	1:1		
A4	DWG		
NO.	C-100410		
SHEET	1 OF 1		
REV	A		

USED ON

-