




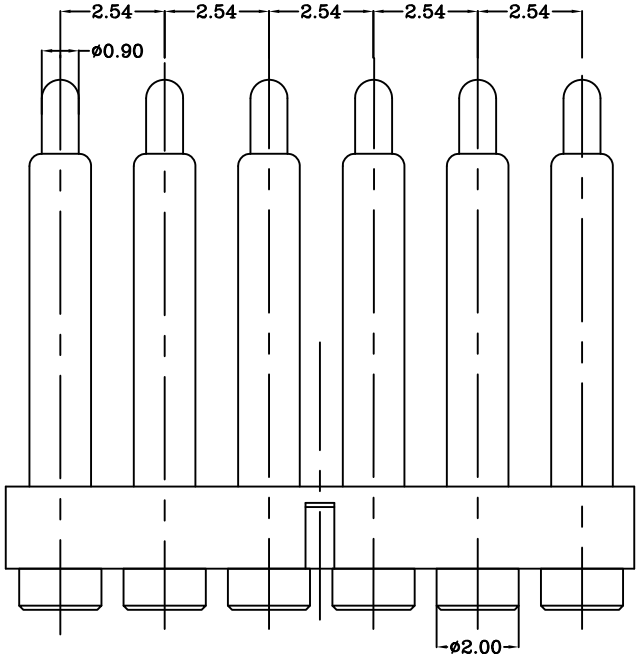

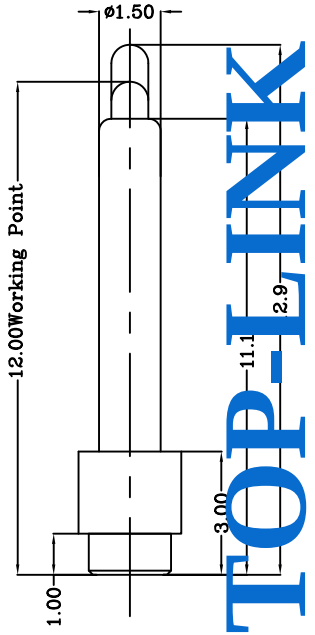


TOP-LINK

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
2 Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um Ni.

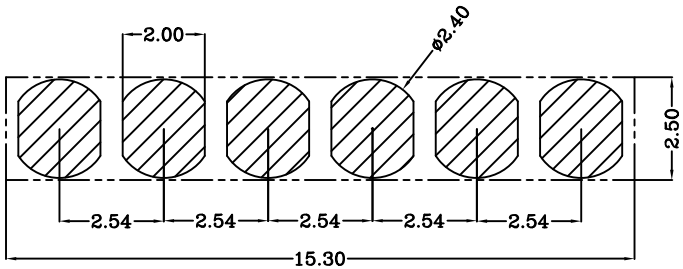

Recommended PCB Layout



USED ON
—

DWG NO. C-110558

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LOC	DIST
-	-

LTR	REVISION RECORD	APVD	DATE
	NEW		09/10/21

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
	—	—

DWN	APVD	
Qin		top-Link Electronics Top-Link Electronics Ltd.
CHK	REL	

NAME: POGO CONNECTOR 6 POSITIONS
PGC-1.5-12.9-R-6P-2.54PH

SCALE		DWG NO.	SHEET	REV
1:1	A4	C-110558	1 OF 1	A

110558-6
PART NUMBER

4 3 2 1

D C B A