


DWN No.:	C-1001102
----------	-----------

Item	Part name	Q'ty/Ea	Material	Finish
1	HSG	1	股3P A46	——
2	Body	12	C3604(黄铜C3604)	Au plating 0.1um min Ni plating 1.4um min
3	Plunger	12	C3604(黄铜C3604)	Au plating 0.4um min Ni plating 1.4um min
4	Spring	12	SUS304(不锈钢SUS304)	——
5	CAP	1	股3P A46	——

Table 1 Mechanical performance		
max working height (最大工作高度)	4.00mm	80gf min<2.1>
min working height (最小工作高度)	3.60mm	180gf max<2.1>
Durability(寿命)	10000cycle(10000次)	

6 RoHS compliant. (产品符合RoHS标准)

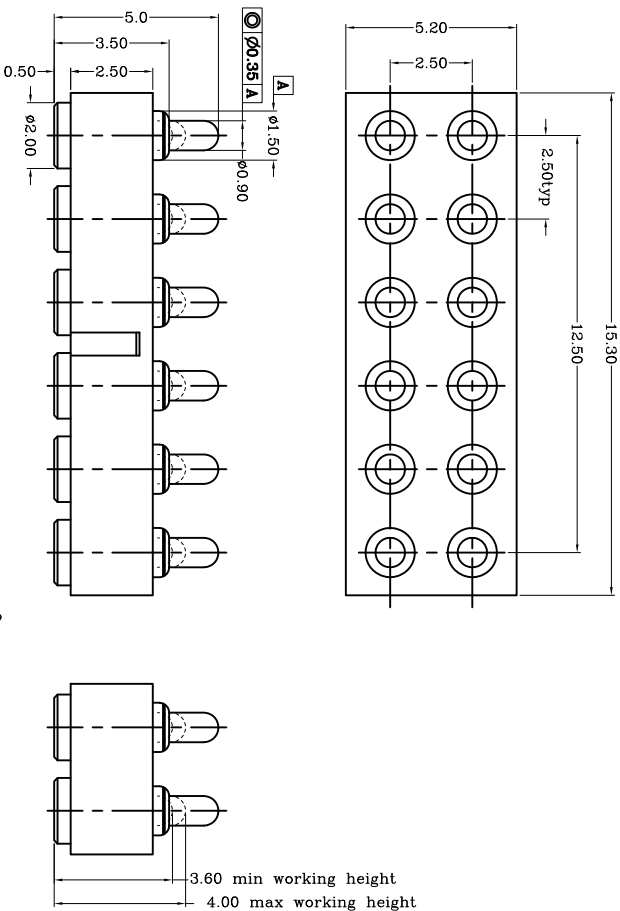

TOP-LINK

Technical drawing of a 2x6 grid of circles. The circles are arranged in two rows and six columns. The horizontal distance between the centers of the first and second columns is 2.50. The vertical distance between the centers of the first and second rows is 12.50. The diameter of each circle is labeled as $\phi 2.20$.

Top-Link Electronics Ltd	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWG:	APVD:	 Top-Link Electronics Top-Link Electronics Ltd		
0.0 = ± 0.15	Gui zhiguo				
0.00 = ± 0.10	CHK:	REL:			
0.000 = ± 0.005	Name		Pogo pin connector		
Angle: 45°	Scale	Size	DWG No.	Page	Rev.
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	1:1	A4	C-1000102	1/1	2