


Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	———
2	Body	8	Leaded Brass	Gold plating over Nickel plating
3	Plunger	8	Leaded Brass	Gold plating over Nickel plating
4	Spring	8	Stainless steel wire	———
5				

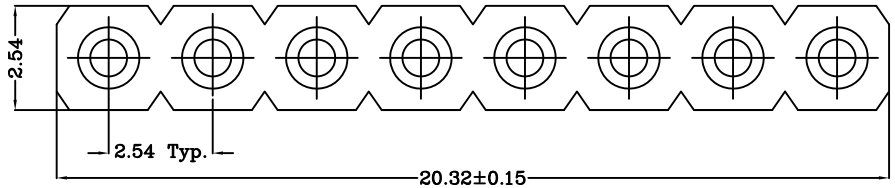

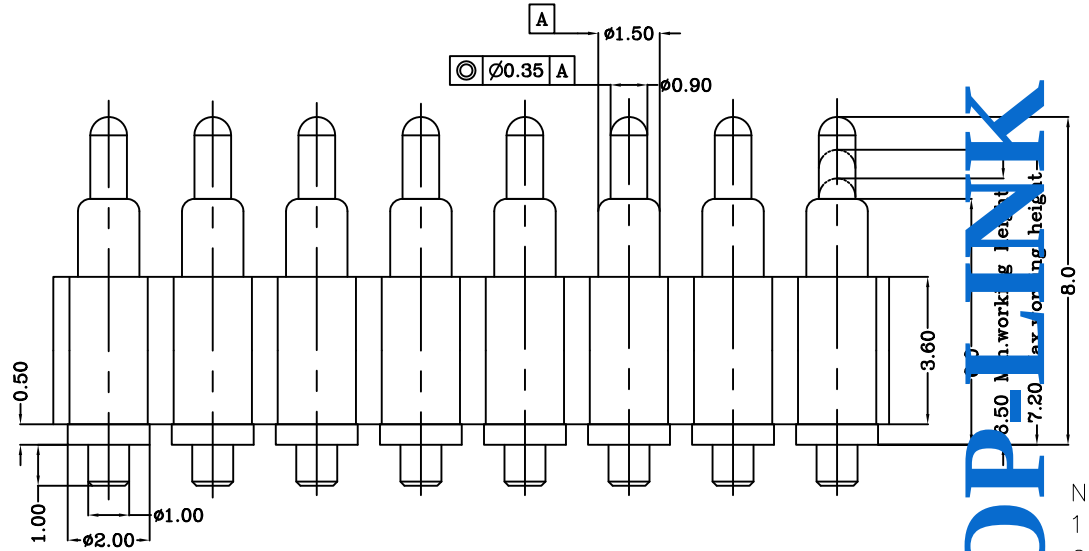

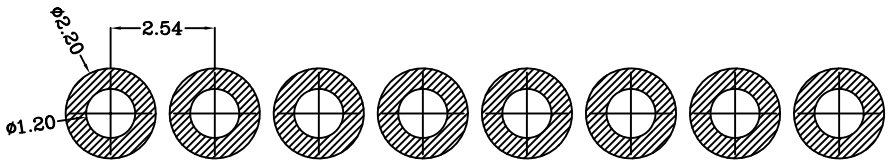

Recommended PCB Layout

Table 1 Mechanical performance		
Max.working height	7.20mm	75±20gf <2.1>
Min.working height	6.50mm	130±30gf
Durability	10000cycle	

Notes:
1 Demensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
4 RoHS compliant.

TOP-LINK

Rev.	Revision record.	Date.
	Renewal	2012/02/15
	NEW	2010/11/02

Top-Link Electronics Ltd.
TOLERANCES UNLESS OTHER SPECIFIED
0. = ± —
0.0 = ± 0.15
0.00 = ± 0.10
0.000= ± —
Angle: ±1°
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.

Type: Customer drawing	Unit: mm	Weight	
DWN: Qin Zuozhong	APVD:	top-link Electronics Top-Link Electronics Ltd.	
CHK:	REL:		
Name: Customer drawing			
Scale: 1:1	Size: A4	DWG No.: C-110656	Page: 1/1	Rev.: 1

110656-8
PART NUMBER

DIST ———
DIST ———

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.: C-110656

4 3 2 1
D C B A