


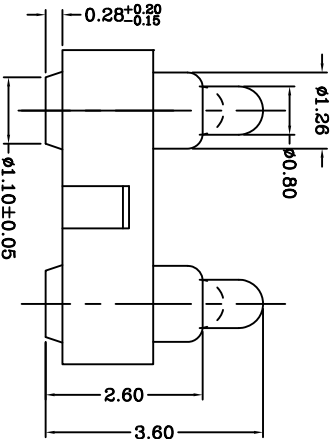


DWG NO.
C-100191

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

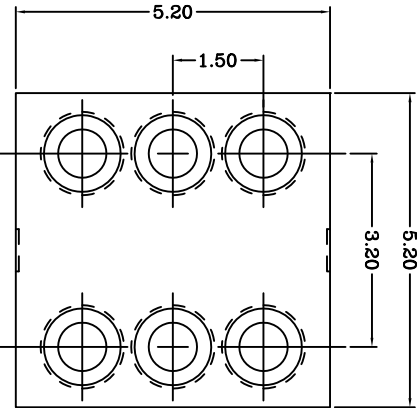

TOP-LINK

Notes:

Material(材质):

Housing: PA46, UL94 V-0 Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.25um Gold plating over min. 2.5um Nickel plating

(Plunger: 镀金0.25um Min 镍底2.5um Min)

3 Mechanical:

Force(力): 70±20 gf at 0.65 mm stroke

Total stroke(总行程): 1.00mm

Durability(寿命): 10,000 cycle min

4 Electrical(电性能)

Contact resistance(接触阻抗): 50mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

Recommended PCB Layout

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

		NAME		PGG CONNECTOR 6 POSITIONS		PGC-1,26-3,6-2R-6P-1,5PH	
		SURF TEXTURE: $\frac{3}{2}$		REMOVE BURRS, BREAK SHARP EDGES R0,05 MAX		DD NOT SCALE PRINT	
Update tolerance		2007/10/20					
LTR		REVISION RECORDED		APVD		DATE	
		SCALE 1:1		A4		DWG C-100191	
						SHEET 1 OF 1	
						REV E	

USED ON

-

100191-6

PART NUMBER

Top-Link
Electronics L td.

NAME PGGD CONNECTOR 6 POSITIONS

PGC-1.26-3.6-2R-6P-1.5PH

SCALE 1:1 A4 DWG NO. C-100191

1:1

A4

DWG

NO. C-100191

SHEET

1 OF 1

REV

E