
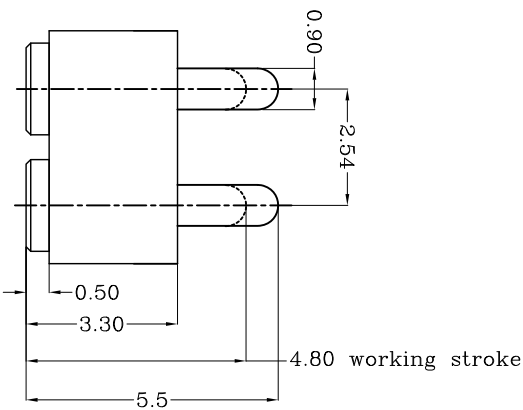


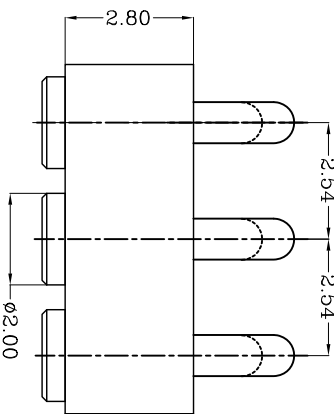

TOP LINK

Material(材质)

Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

Spring : Stainless steel wire(不锈钢)

2 Plating(电镀):

Plating: 0.05um Pd plating over 0.25um Pd Ni plating over 1.4um Ni

lunger: 底层: Ni 1.4um 中间层: Pd Ni 0.25um 表面层: Pd 0.05um)

Body: 0.05um Pd plating over 0.25um Pd Ni plating over 1.4um Ni

(body: 底层: Ni 1.4um 中间层: Pd Ni 0.25um 表面层: Pd 0.05um)

3 Mechanical (机械性能):

Force: Max 600gf per pin at 0.7mm stroke

力:下压0.7mm的力:60gf max)

Total stroke(总行程) : 1.00mm

Durability(寿命): 10,000 cycle min.

USED ON

1

100223-6

PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°		APVD		—		— ✓	
SURF TEXTURE: 3.2/ REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		DWN		qin		Top-Link Electronics Ltd.	
		CHK		REL			
NAME		PGOG CONNECTOR 6 POSITIONS PGC-1.5-5.5-2R-6P-2.54PH					
SCALE		A4		DWG NO.		SHEET 1 OF 1	
1:1				C-100223		REV D	
LDC							
-							
DIST							
-							