
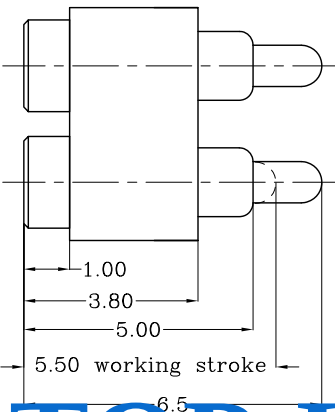
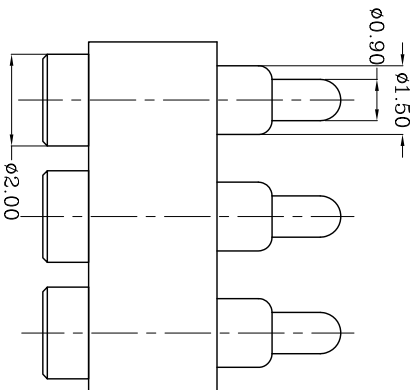


DWG NO.
C-110658

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

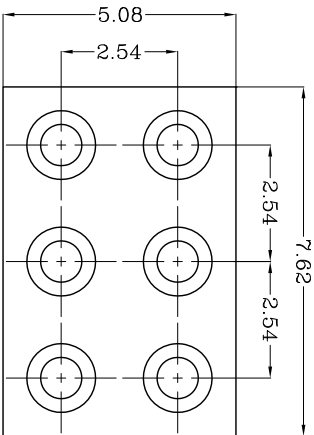

Notes:
Material(材质):
Housing: High temp.Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

Mechanical:
Total stroke(总行程): 1.30mm
Force(弹力):125±35gf per pin at 1.0mm stroke
Durability(寿命): 10,000 cycle min.

Electrical(电性能)
Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

NEW			2010/11/09
REVISION			
RECORD			
DATE			

LDC	-
DIST	-

USED ON
-

110658-6

PART NUMBER

Top-Link
Electronics Ltd.

POGO CONNECTOR 6 POSITIONS
PGC-1.5-6.5-2R-6P-2.54PH

NAME	SCALE	A4	DWG NO.	C-110658	SHEET 1 OF 1	REV A
	1:1					

4

3

2

1