


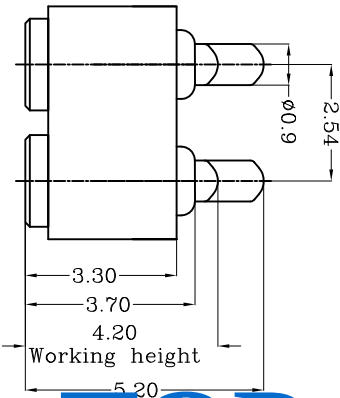


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

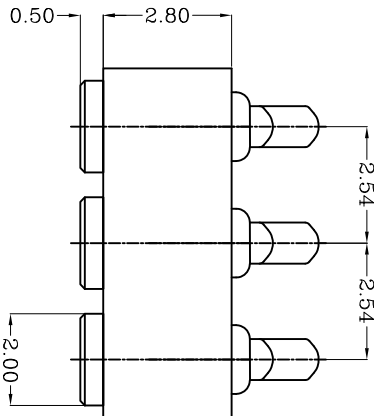

DWG NO.
C-110662

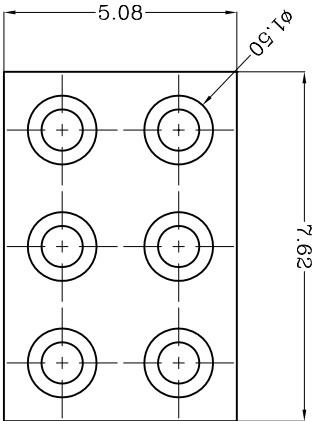

Notes:
1 Material(材质):

Housing: High temp.Plastic, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Optal stroke(总行程): 1.30mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

TOP-LINK

USED ON

-

110662-6

PART NUMBER

MATL	HT TR	FIN
	—	—

DWN	APVD	REL
0		
0.0		
0.00		
0.000		

Top-Link
Electronics Ltd.

NAME

POGO CONNECTOR 6 POSITIONS
PGC-1.5-5.2-2R-6P-2.54PH

SCALE	A4	DWG NO.	SHEET	REV
1:1		C-110662	1 OF 1	A

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

2010/11/28

NEW

DATE	APVD	REVISION RECORD	L TR

4

3

2

1