
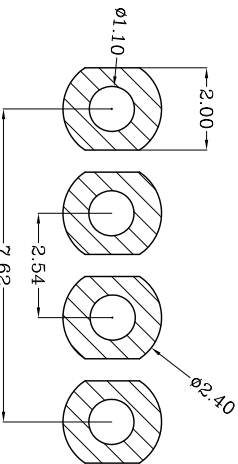
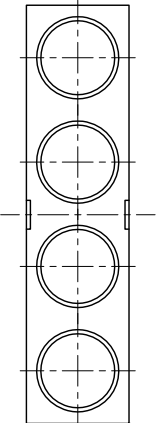
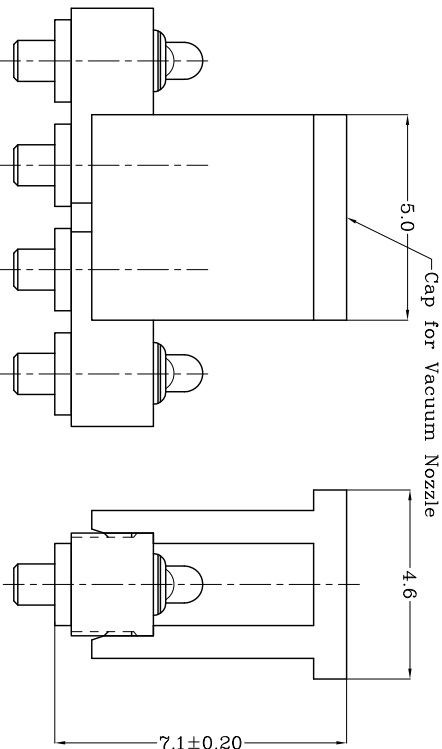

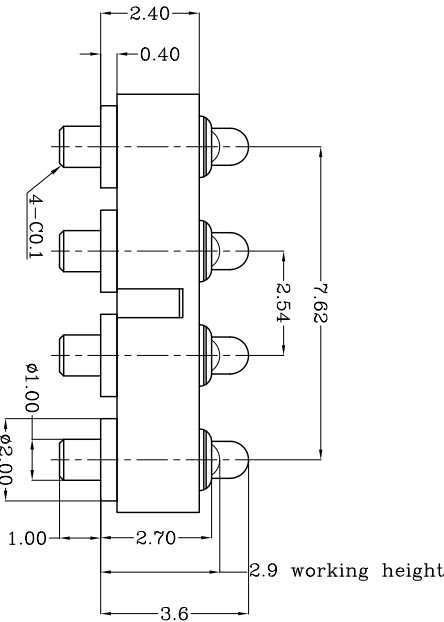


DWG NO.
C-100572

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

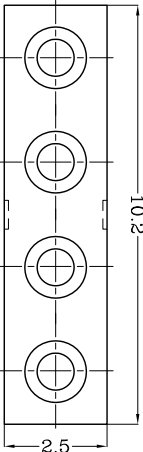

Notes:

Material(材质):
Housing: HTN, UL94 V-0 Color Black.
Contact: Bro
Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.4um Gold plating over min. 1.4um Nickel plating (Body: 镀0.4um 镍底1.4um 镍)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀0.4um 镍底1.4um 镍)

3 Mechanical:

Total stroke: 0.80mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触电阻): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

TOP LINK

USED ON

100572-4

PART NUMBER

MATL



HT TR

FIN



DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ± 0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

NAME

PGGD CONNECTOR 4 POSITIONS
PGC-1.5-3.6-R-4P-2.54PH

Top-Link
Electronics
Electronics Ltd.

SHEET

1 OF 1

REV

A

NEW

REVISION
RECORD

APVD

DATE

6009/12/01

LTR

4

3

2

1