
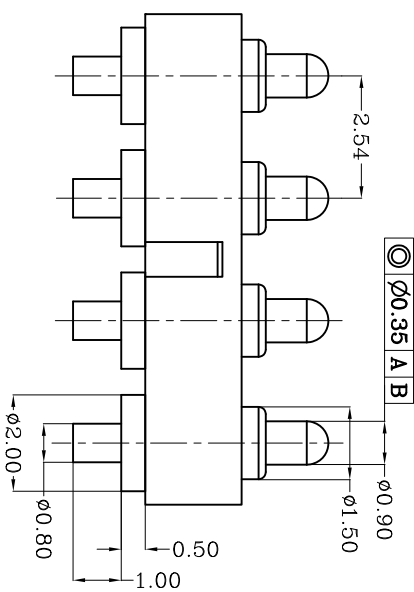
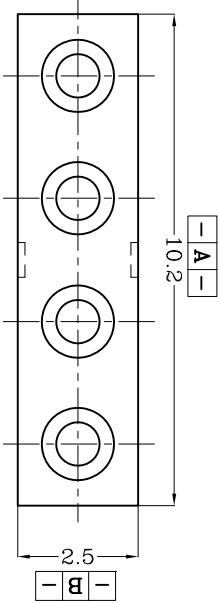



TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Gold plating over Nickel plating
3	Plunger	4	Leaded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5				

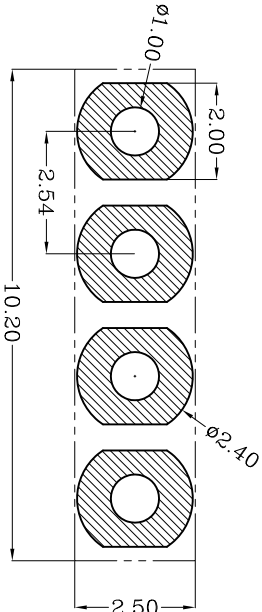

Recommended PCB Layout

Table 1 Mechanical performance		
Working height	3.50mm	90±25gf <2.1>
Durability		10000cycle

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Type	Unit	Weight	PART NUMBER
Top-Link Electronics Ltd.	Customer drawing	mm	110790-4
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	APVD:	
0.0 = ±0.15	Qin Zuozhong		
0.00 = ±0.10	CHK:	REL:	
0.000 = ±0.05			
Angle: ±1°	Name	Customer drawing	
SURF. TEXTURE:			
REMOVE BURRS:			
BREAK SHARP EDGES			
R0.05 MAX.DO NOT SCALE PRINT.	Scale	Size	DWG No.
	1:1	A4	C-110790

Top-Link Electronics Ltd.

Top-Link Electronics Ltd.

DIST

	NEW	2012/02/24
Rev.	Revision record.	Date.