

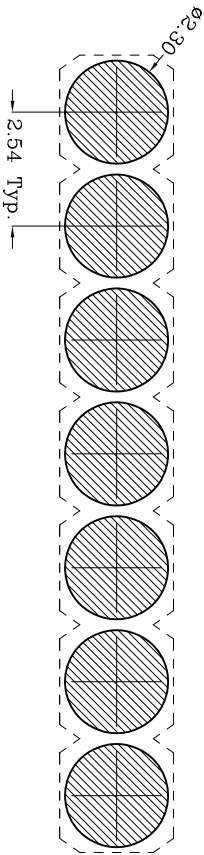


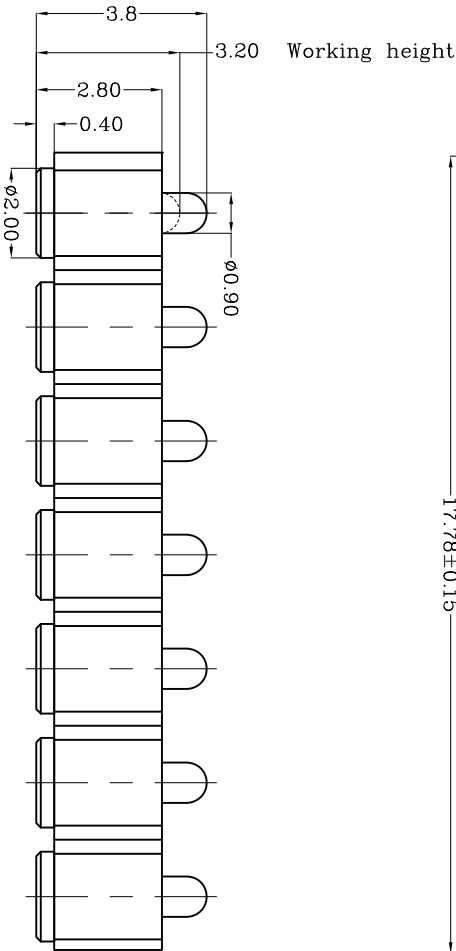

proposal

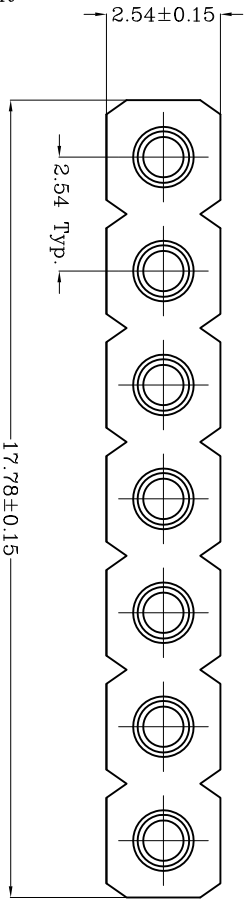

Recommended PCB Layout

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	7	Leaded Brass	Au plating over Ni
3	Plunger	7	Leaded Brass	Au plating over Ni
4	Spring	7	Stainless steel wire	_____
5				

Table 1 Mechanical performance		
Working height	3.20mm	60gf min <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
- 4 RoHS compliant.

110806-7
PART NUMBER

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0	± 0.15	DWN:	APVD:			
0.00	± 0.10	CHK:	REL:			
0.000	± 0.05					
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Name		Customer drawing		
		Scale	Size	DWG No.	Page	Rev.
		1:1	A4	C-110806	1/1	1

Top-Link
Electronics Ltd.

DIST

	NEW	2012/04/17
Rev.	Revision record.	Date.