


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-100218

LDC
-
DIST
-


4

3

2



1

- Notes:
- Material, Housing: PA 4/6 (30% Glass Filled)
Contact: Brass
Color: Black.
 - Mechanical demands:
Spring force: 12 $\pm$ 0.30N/-0.20N with 12mm stroke.
Full stroke: 1.4mm
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

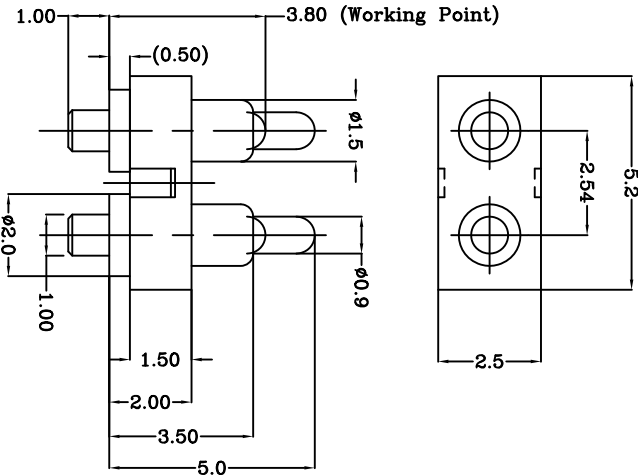

TOP-LINK

Recommended PCB Layout

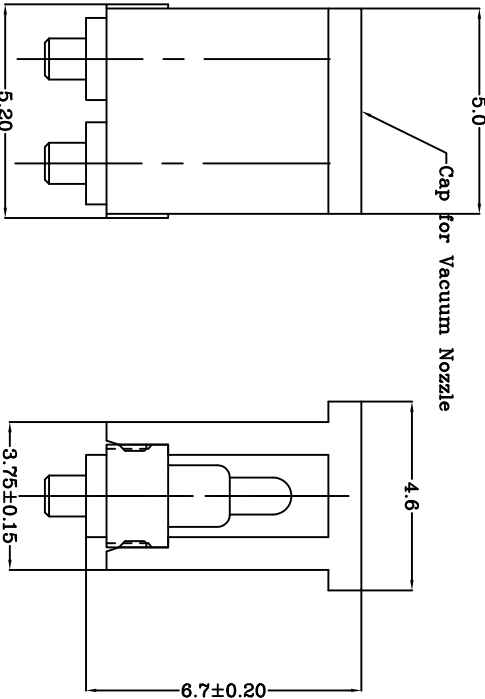

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL				HT TR				FIN			
0	= ±			0	= ±0.15			DWN	Benny	APVD	Lansing	Top-Link Electronics	Top-Link Electronics Ltd.		
0.0	= ±0.10			CHK	Andy										
0.000	= ±			NAME	BATTERY	POGO CONNECTOR	2 POSITIONS								
ANGLE: ±1°				SCALE	1:1	A4	DWG NO.	C-100218							
SURF TEXTURE: 32/				REMOVE BURRS, BREAK											
SHARP EDGES R0.05 MAX															
DO NOT SCALE PRINT															

100218-2

PART NUMBER

A

B

C

D