



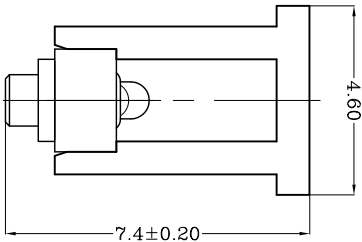
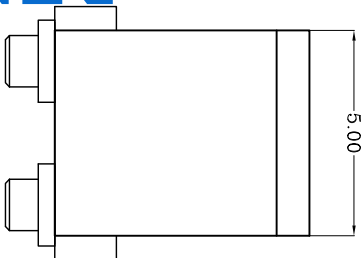


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

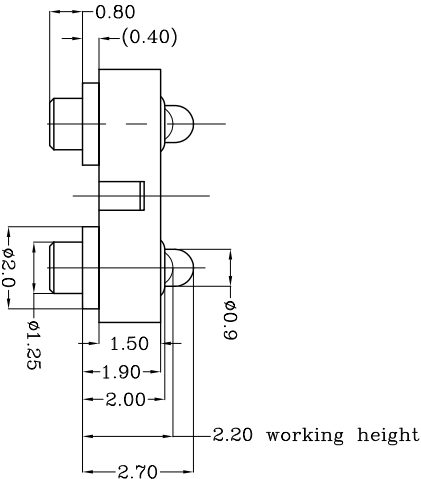

DWG NO.
C-100293



Recommended PCB Layout

TOP-LINK

USED ON
-

100293-2

PART NUMBER

A

B

C

D

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black

Contact: Brass
2 Mechanical demands:
Plating Plunger: Min. 0.4um Au over 14um Ni
Plating Body: Min. 0.1um Au over 14um Ni
Spring Force: 108±22 gf.

LDC

-

DIST

-

4

3

2

1

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±

SURF TEXTURE: 32/
ANGLE: ±1°

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL
DWN
Jim

HT TR
—

FIN
—

APVD
Lansing

REL

Top-Link
Electronics Ltd.

CHK
Andy

NAME

BATTERY POGO CONNECTOR 2 POSITIONS

SCALE
1:1

DWG
NO.

PGC-15-2.7-R-2P-3SPH

NAME

DWG
NO.

PGC-15-2.7-R-2P-3SPH

SHEET
1 OF 1

REV
B