

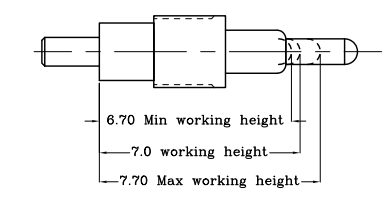
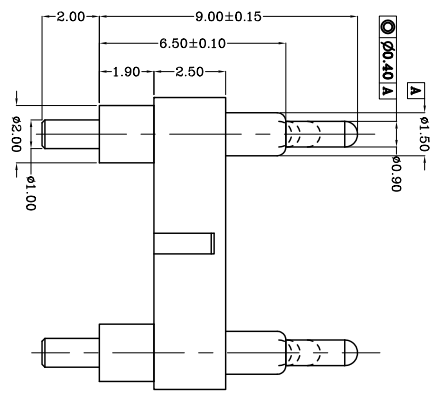
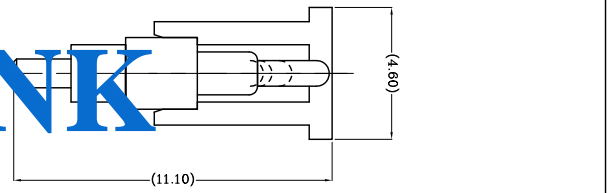
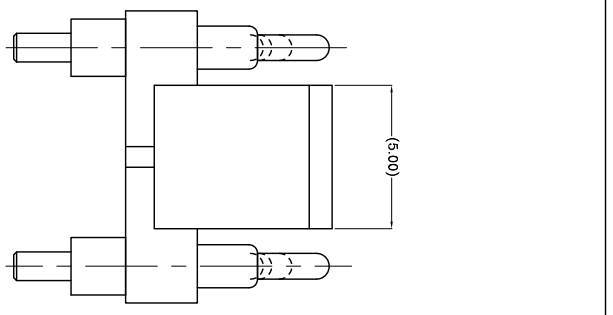
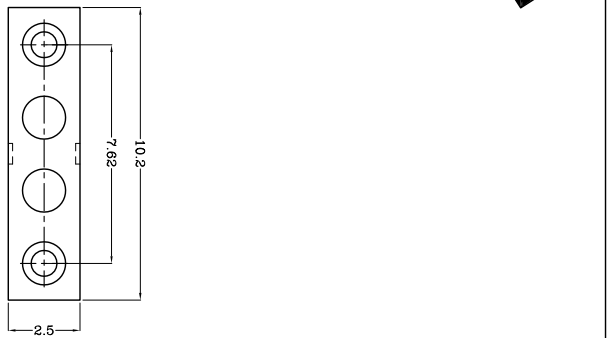


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.:

C-100954

Proposal



TOP-LINK

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 RoHS compliant.

Table 1 Mechanical performance		
working height	7.00mm	80gf Min
Durability	100000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	PA46 UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	PA46 UL94 V-0 Color Black	_____

DIST
DIST
DIST

Rev.	Revision record.	Date.
	NEW	2013/07/29

Top-Link Electronics Ltd.	Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm	
0.0 = ± 0.15	DWN: Gui zhiqiao		
0.00 = ± 0.10	CHK: REL:	APVD:	
0.000 = ± 0.05	Angle: 45°	REL:	
SCALE PRINT:	REMOVE BURRS:	NAME	Pogo pin connector
BREAK SHARP EDGES	REMOVE BURRS:	Scale	1:1
RO.05 MAX. DO NOT SCALE PRINT.	REMOVE BURRS:	Size	A4
		DWG No.	C-100954
		Page	1/1
		Rev.	1

100954-2
PART NUMBER



Top-Link Electronics Ltd.

4

3

2

1