



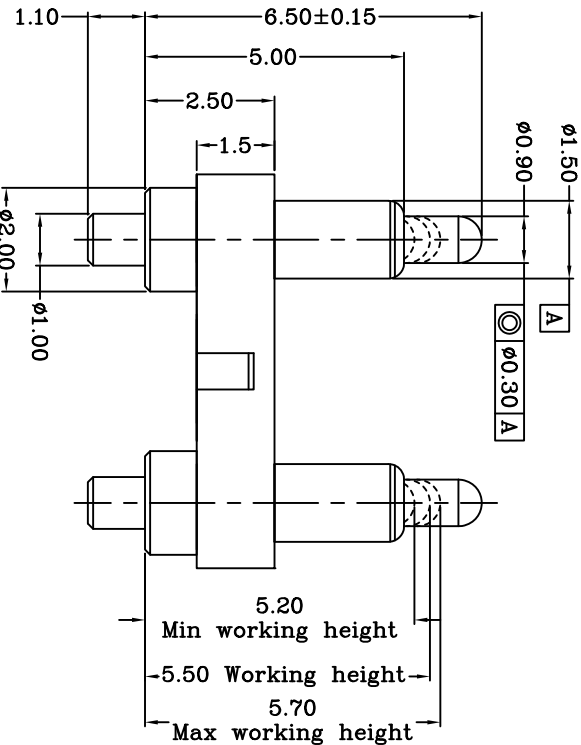


proposal

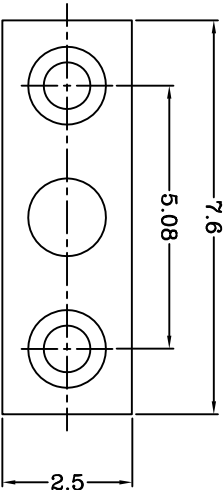

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
 - 4 Packaging specification conforms to EIA 481
 - 5 RoHS compliant.

TOP-LINK

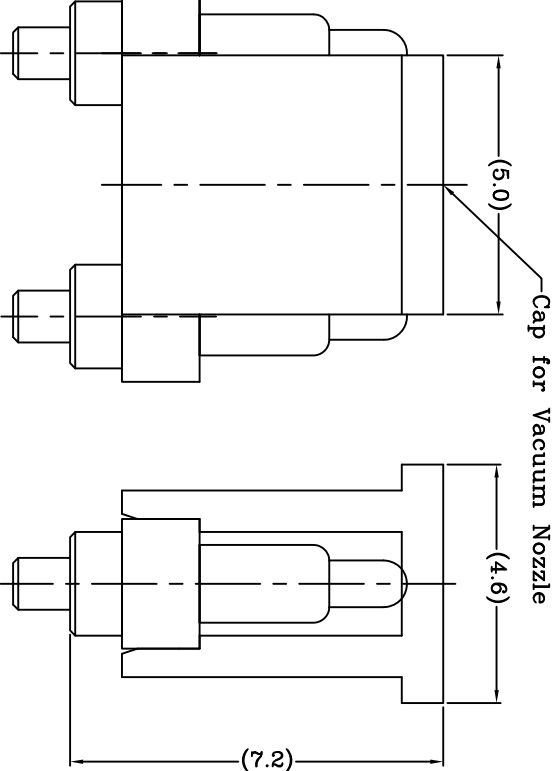

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	2	Leaded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic	_____

Table 1 Mechanical performance		
Working height	5.50mm	125±30gf
Durability	10000cycle	

10101021571
PART NUMBER

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wanlu	APVD:			
0.0 = ±0.15	CHK:		REL:			
0.00 = ±0.10						
0.000 = ±						
Angle: ±						
SURF. TEXTURE:	Name	Customer drawing				
REMOVE BURRS.						
BREAK SHARP EDGES						
RO.05 MAX.D0 NOT	Scale	Size	DWG No.		Page	Rev.
SCALE PRINT.	1:1	A4	C-10101021571		1/1	1

Top-Link
Electronics

Top-Link
Electronics Ltd.