
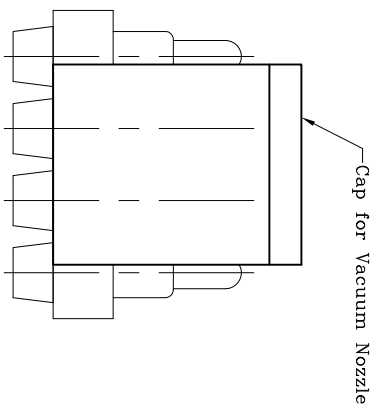
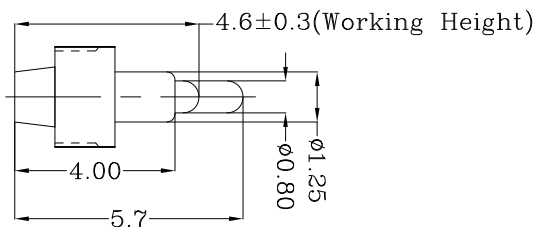


TOP-LINK

Recommended PCB Layout

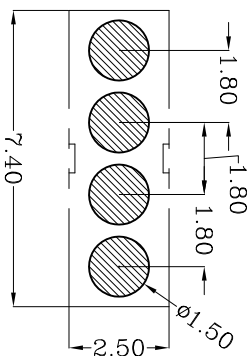

Notes:

- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color: Black,
Contact: Brass
- 2 Mechanical demands:
Spring force: Min 0.2N with 0.5mm stroke
1.0-0.60N/1.0-0.20N with 1.0mm stroke
- Full stroke: 15mm
- Plating Plunger: Min 0.4um Au over 1.4um Ni
- Plating Body: Min 0.1um Au over 1.4um Ni.

LDC				2017/02/15
-				
DIST		Change 2 mistakes		2008/03/05
-		new		2008/02/20
	LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MTRL		HT TR		FIN	
0 = ±		DWN		APVD		— ✓	
0.0 = ±0.15		RICHARD REN		—		Top-Link	
0.00 = ±0.10		CHK		REL		Electronics Ltd	
0.000 = ±		LANSING HSIAD					
3 ANGLE: ±1°		NAME		BATTERY POGO CONNECTOR			
SURF TEXTURE: 32/		4 POSITIONS		1.8PH		PGC-125-5-7-R-4P-1.8PH	
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE		DWG		SHEET	
DO NOT SCALE PRINT		1:1		A4		1 OF 1	
				C-100287		REV	
						C1	

100287-4
PART NUMBER