
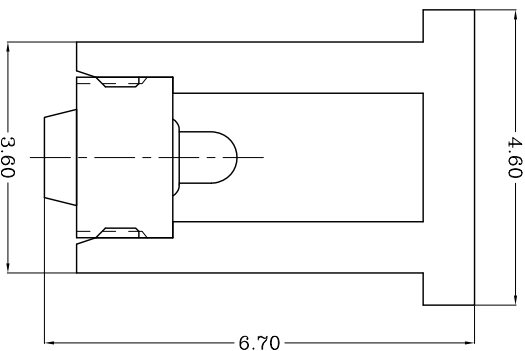
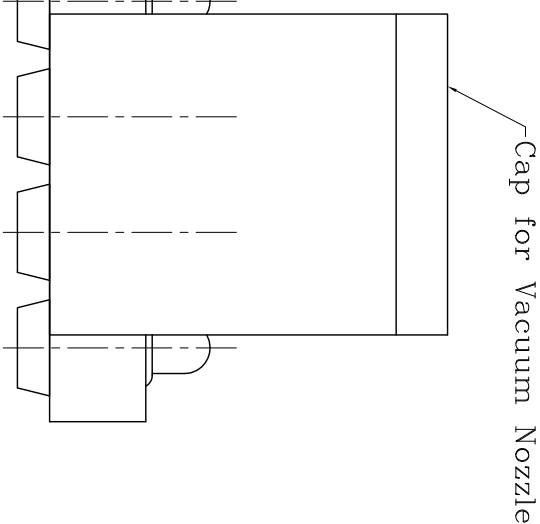
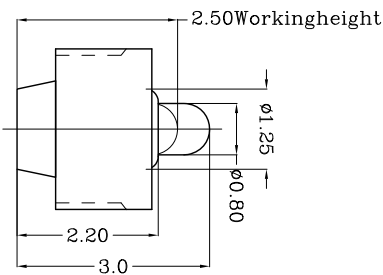
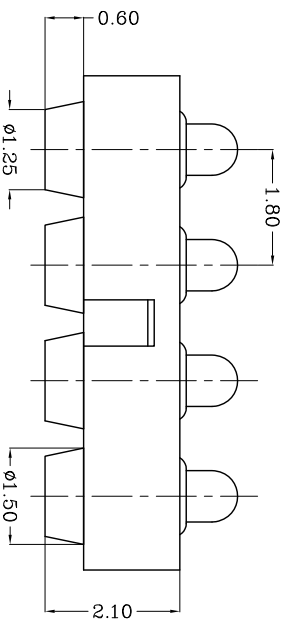


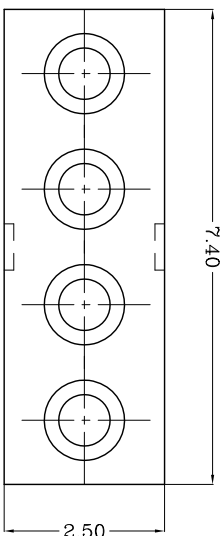

△1 Material(材质):

Housing: PA46, UL94 V-0 Color Black.

Contact: Brass

Spring : Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 鍍金0.1μm Min 鍍底1.4μm Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 鍍金0.4um Min 鍍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 0.70mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)


Contact resistance(接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

LDC		HANDLE: 11		NAME	
-		NEW		PGGD PIN CONNECTOR 4 POSITIONS	
DIST		REVISION RECORD	APVD	DATE	PGC-1.25-3.0-R-4P-1.8PH
-					
		SURF TEXTURE: 3.2/ V		SCALE	
		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		1:1	
				A4	
				DWG NO.	
				C-100616	
				SHEET 1 OF 1	
				REV A	

TOP-LINK

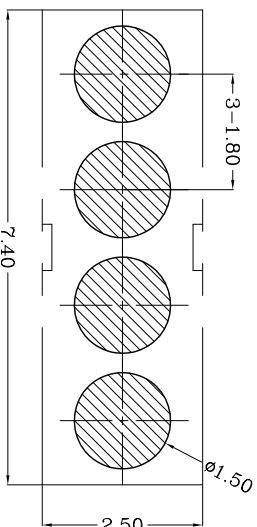

Recommended PCB Layout

100616-4
TAPE NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL	HT TR	FIN
0 = ±		—	—
0.0 = ±0.15		APVD	<i>Top-Link</i> <i>Electronics</i>
0.00 = ±0.10		REL	
0.000 = ±0.01*		CHK	

USED ON