

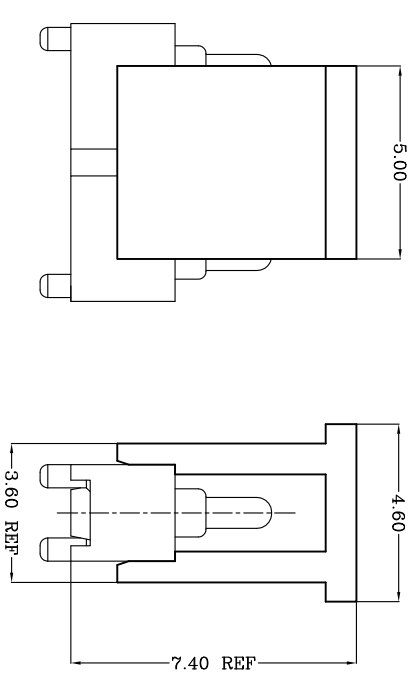
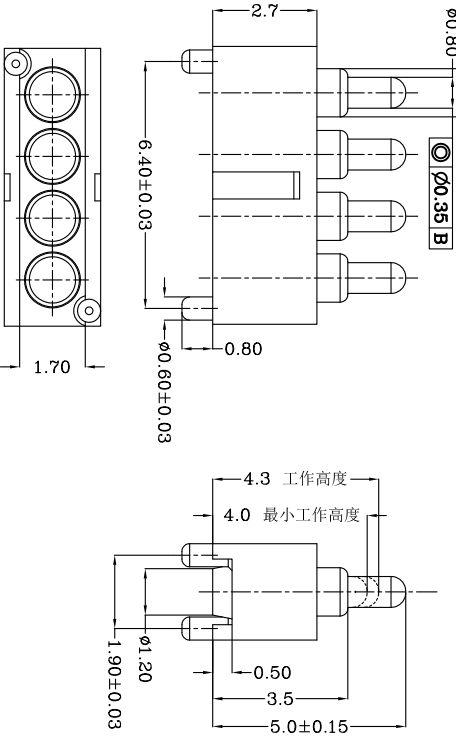


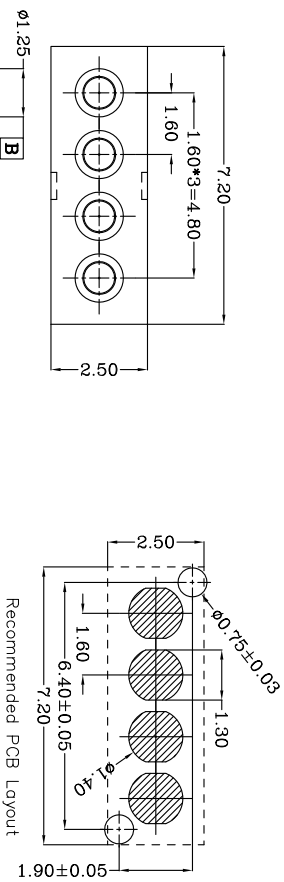

TOP-LINK



- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M
 - 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards
<2.2>Warning:Working height are not permitted to be less than Min working height
 - 3 Electrical performance
<3.1>Current rating: 2.0A
<3.2>Voltage rating: 36VAC/DC
<3.3>Dynamic Resistance:30mOhm Max
(between max and min working height)
<3.4>Insulation Resistance:100MOhm minimum
 - 4 Environmental performance
<4.1> RoHS compliant
<4.2>Operating Temperature range:-40°C~+85°C
<4.3>Withstanding High Temperature:260°C/10Sec
 - 5 Packaging:Carrier tape

Table 1:Mechanical performance		
Working Height	4.30mm	30±10gf
Durability	10000 Cycles Min.	

Top-Link Electronics Ltd.		
TOLERANCES UNLESS OTHER SPECIFIED		
0.0	=	± 0.15
0.0	=	± 0.10
0.000	=	± 0.005
Angle: #1	=	± 0.1
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAXDO NOT SCALE PRINT.		
Type	Customer drawing	Unit mm
DRW:	Caliwanlu	APRD:
CHK:	REL:	
Name Pogo Pin Connector		
Scale	Size	Part NO.
1:1	A4	100629-4
		Page 1/1
		Rev: B

top-link