
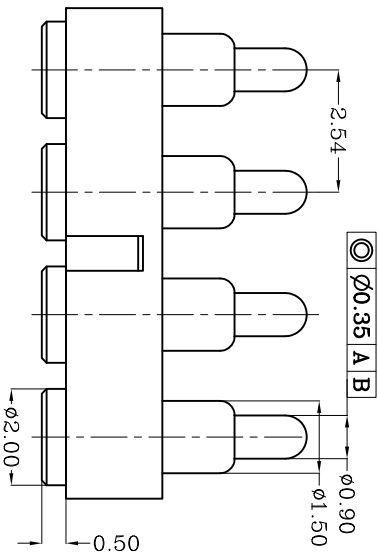
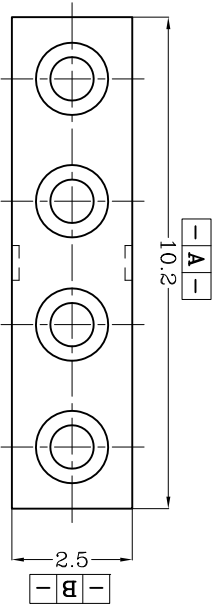
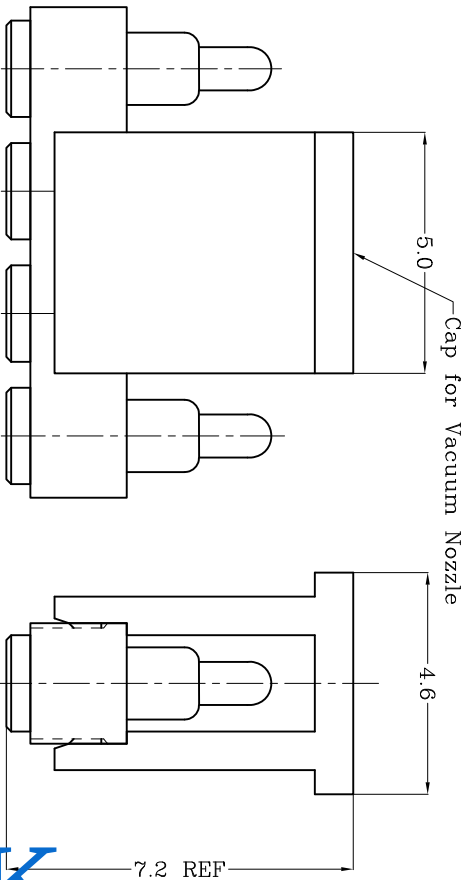


TOP-LINK

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Gold plating over Nickel plating
3	Plunger	4	Leaded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

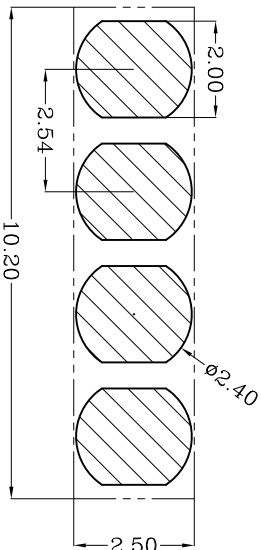

Recommended PCB Layout

Table 1 Mechanical performance		
Working height	4.50mm	30±15gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 200mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight			
TOLERANCES UNLESS OTHER SPECIFIED		DWG:	Customer drawing	mm			
0.0	± 0.15	Qin Zuozhong	APVD:	Topo-Link Electronics Top-Link Electronics Ltd.			
0.00	± 0.10	CHK:	REL:				
0.000	± 0.05						
Name			Customer drawing				
Scale			Size				
1:1	A4	DWG No.	C-100804	Page	1/1	Rev.	1

Top-Link Electronics Ltd.

Rev.	NEW	Date.
3	Revision record.	2012/04/13

DIST
