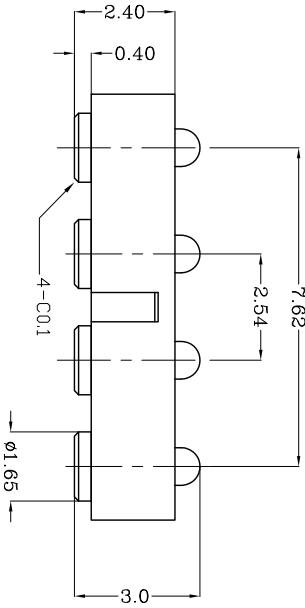
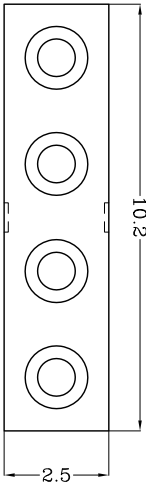



Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Gold plating over Nickel plating
3	Plunger	4	Leaded Brass	Gold plating over Nickel plating
4	Spring	4	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Recommended PCB Layout

Table 1 Mechanical performance			
Working height	2.6mm	40gf Max	<2.1>
Durability	10000cycle		

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:200mOhm Max.Current rating: 0.3A
- 4 RoHS compliant.

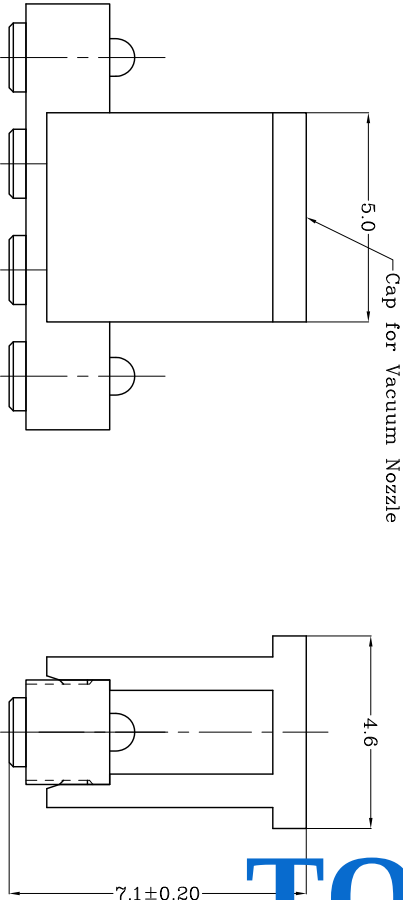

TOP-LINK

Top-Link Electronics Ltd.				Type	Unit	Weight	
TOLERANCES UNLESS OTHER SPECIFIED				DWN:	APVD:	Top-Link Electronics Top-Link Electronics Ltd.	
0.0 = ± 0.15				CHK:	REL:		
0.00 = ± 0.10							
0.000 = ± —							
Angle: 41°							
SURF. TEXTURE:							
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX.IDO NOT SCALE PRINT.							
				</			

DIST

Rev.	NEW	2012/05/31
Revision record.	3	Date.