

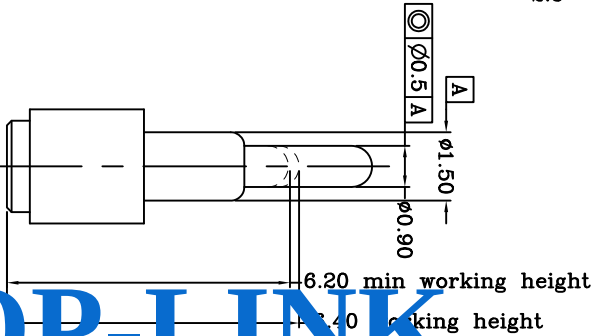
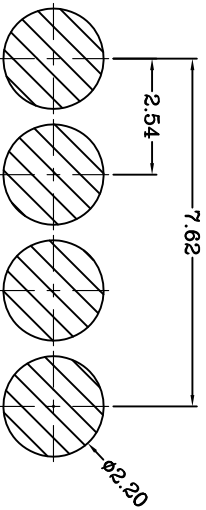


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

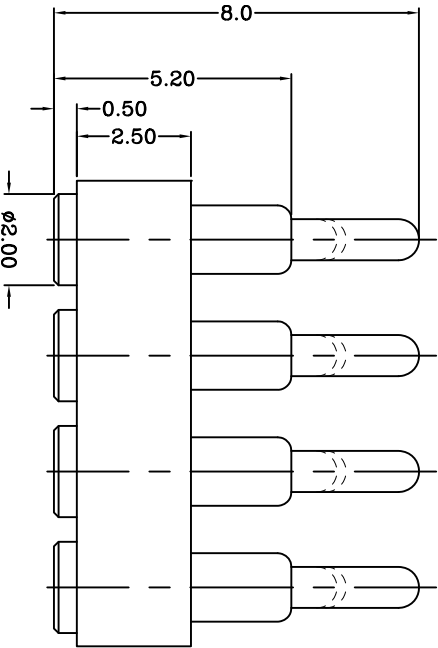

DWN No.:
C-1101122

proposal

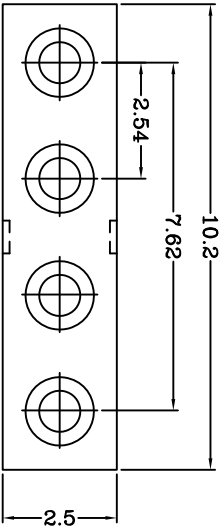

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	4	Leaded Brass	Au 0.1um plating over Ni 1.4um plating
3	Plunger	4	Leaded Brass	Au 0.4um plating over Ni 1.4um plating
4	Spring	4	Stainless steel wire	_____
5				

Table 1 Mechanical performance		
working height	6.40mm	120±25gf <2.1>
Durability	10000cycle	



Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning:Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Type	Unit	Weight
Customer drawing	mm	

Top-Link Electronics Ltd.	DWN:	APVD:	Top-Link Electronics Ltd.
OTHER SPECIFIED	Guizhiguo	REL:	
0.0 = ±0.15			
0.00 = ±0.10			
0.000 = ±0.05			
Angle: ±1°			
SURF. TEXTURE:			
REMOVE BURRS:			
BREAK SHARP EDGES			
RO.05 MAX. DO NOT			
SCALE PRINT.			

Name	Scale	Size	DWG No.	Page	Rev.
Pogo pin connector	1:1	A4	C-1101122	1/1	2.1

DIST

DIST

4

3

2

1