




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

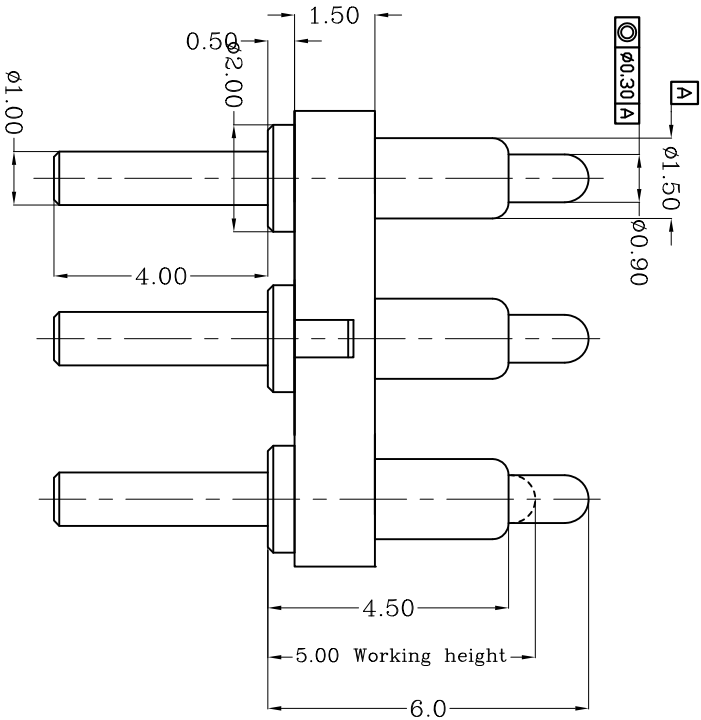

DWN No..
C-110808

proposal

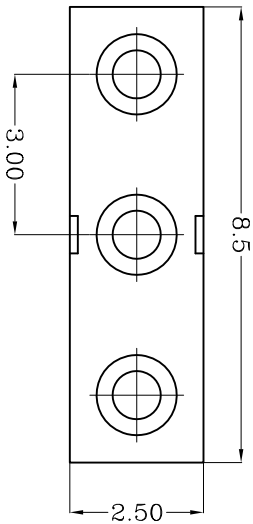

Item	Part name	Qty/Lot	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

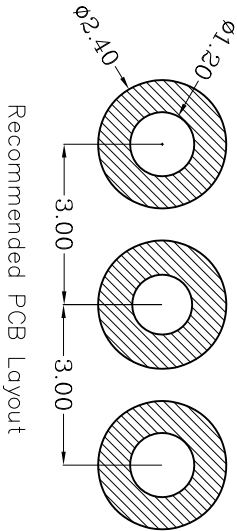


Table 1 Mechanical performance

Working height	5.00mm	135±30gf <2.1>
Durability		10000cycle

Notes

1. Dimensions shall be interpreted per ASME Y14.5M.
2. Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
3. Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
4. RoHS compliant.

TOP-LINK

Top-Link Electronics Ltd.	Type Customer drawing	Unit mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± 0.05 Angle: ± 1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES RO.05 MAX.DO NOT SCALE PRINT.	DWN: Qin Zuozhong	APVD: REL:	Top-Link Electronics Ltd.
Name Customer drawing	Scale 1:1	Size A4	DWG No. C-110808

110808-3
PART NUMBER

DIST

DIST

Rev.

Revision record.

Date.

4

3

2

1

Page 1/1
Rev. 1