


DWG NO.
C-101134

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

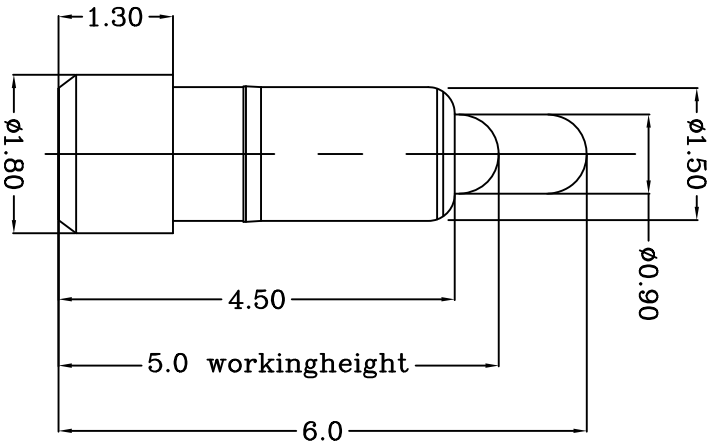

Notes:
△ Material(材质):

- 1)Body :Brass
- 2)Plunge :Brass
- 3)Spring :Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.1um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1)Force: 80gf Min per pin at 1.0mm stroke (力: 下压1.0mm 时力: 80gf Min)
 - 2)Total stroke (总行程) : 1.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

LDC
-
DIST
-

	update remark		2010/09/25
	NEW		2007/12/04
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.15		
0.00	= ± 0.10			0.000	= ±		
ANGLE: ±1°							
SURF TEXTURE: 3.2/ √							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DO NOT SCALE PRINT							
MATERIAL		HT TR		FIN		— ✓	
1							
DWN		APVD		Top-Link Electronics Ltd.			
Qlin							
CHK		REL					
NAME				PGGD PIN			
				PG-1.8-1.3-1.5-4.5-6.0			
SCALE		A4		DWG NO.		SHEET	
1:1				C-101134		1 OF 1	
						REV	
						B	