



DIST


4

	Renewal	2010/07/28
	NEW	2009/03/02
Rev.	Revision record.	Date.

3

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Qin zuozhong	APVD:			101338-1
0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.05 Angle: ±1°	CHK:		REL:			
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Name	POGO PIN				
	Scale	Size	DWG No.		Page	Rev.
	1:1	A4	C-101338		1/1	C

A

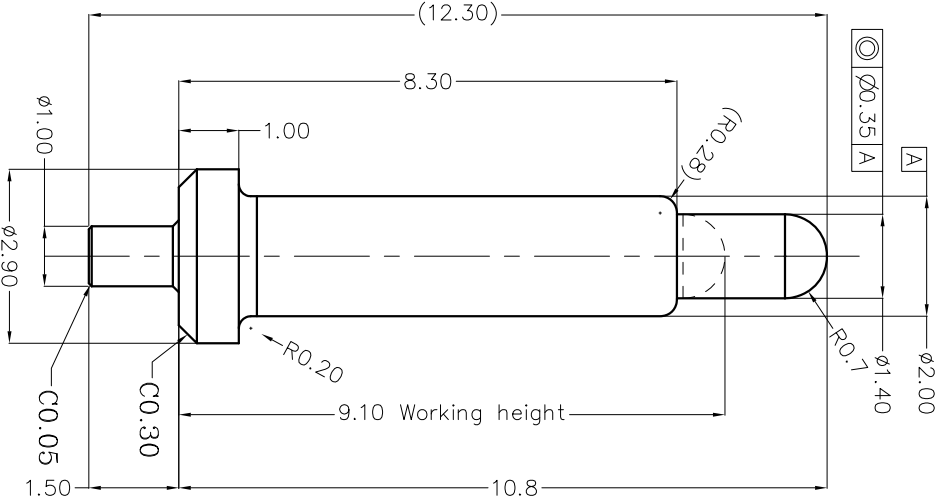

Not

1 Demnnsions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Total stroke : 2.3mm.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 3.0A

4 RoHS compliant.

Table 1 Mechanical performance		
Working height	9.10mm	160±25gf <2.1>
Durability	10000cycle	

C

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

D

2

1