
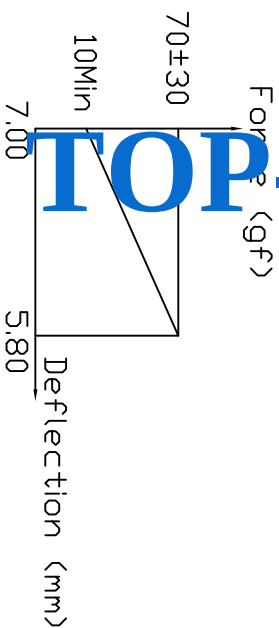
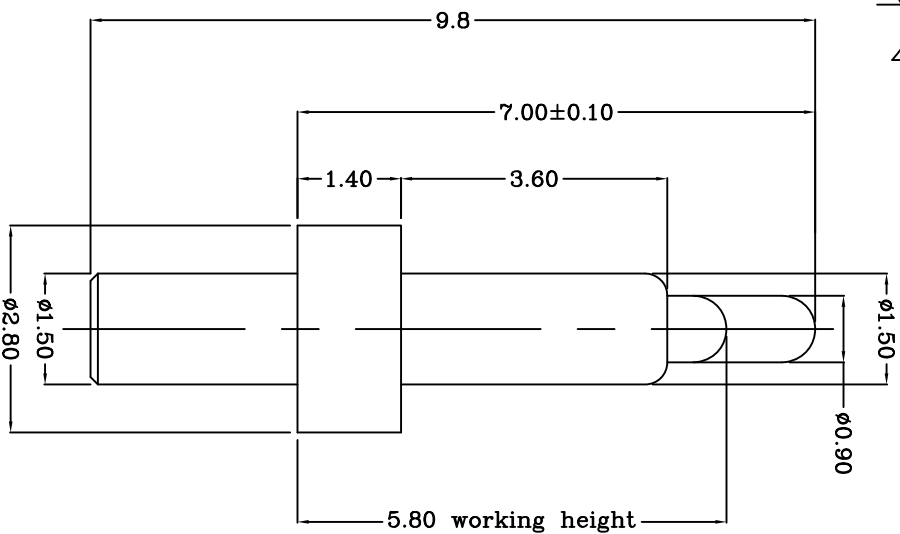


DWG NO.
C-101369



- Notes:
- 1) Material:
- 1) Plunger & Body : CuZn36 PB3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2) Spring : Stainless steel wire
- 2) Plating
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2) Plunger: min 0.4um Gold plating over min. 1.4um Nickel plating
- 3) Mechanical
- 1) Total stroke: 1.9mm
- 2) Durability: 10000 cycle min.

LDC				ANGLE: 1°		NAME				POGD PIN							
-	NEW			SURF TEXTURE: 32/		PG-1.5-2.8-2.8-1.4-1.5-5-7.0											
DIST	L TR REVISION RECORD			APVD		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				SCALE							
-										A4		DWG NO. C-101369		SHEET 1 OF 1		REV 1	

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				101369-1	
0	= ±				
0.0	= ±0.15				
0.00	= ±0.10				
0.000	= ±				
ANGLE: ±1°					
SURF. TEXTURE: 32/					
REMOVE BURRS, BREAK					
SHARP EDGES, R0.05 MAX					
DO NOT SCALE PRINT					
MTRL		△	HT TR	—	FIN
DWN			APVD		
Qln			REL		
CHK			Top-Link Electronics Top-Link Electronics Ltd.		
NAME		PGGD PIN			
SCALE		PG-1.5-2.8-2.8-1.4-1.5-5-7.0			
1:1		A4	DWG NO.	C-101369	
			SHEET	REV	
			1 OF 1	1	
				PART NUMBER	