
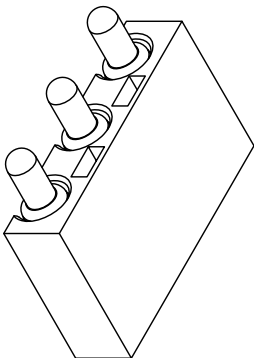
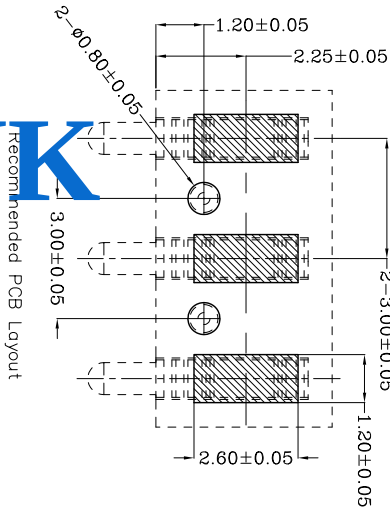



LDC	-
DIST	-

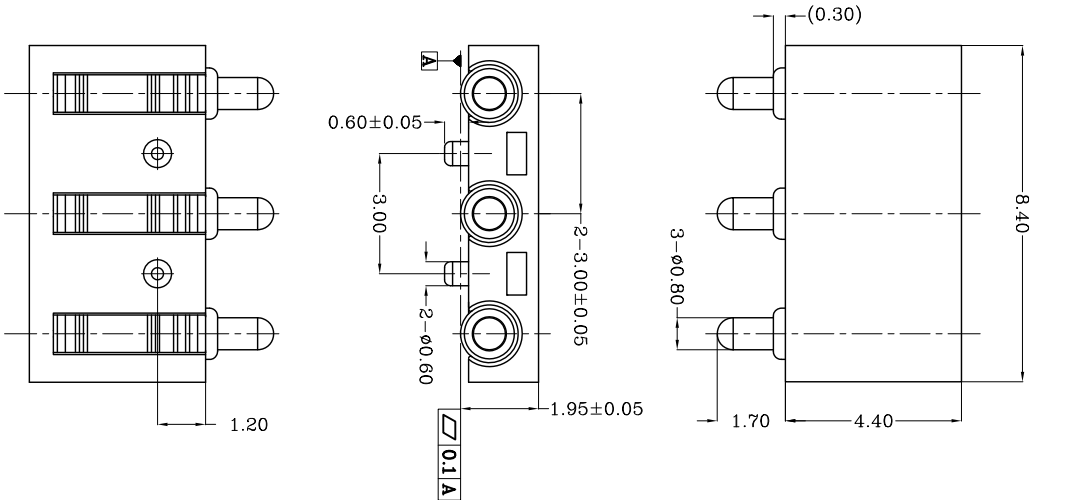

TOP-LINK

Notes:

1 Material(材质):

Housing: HTN, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force:120 $\pm$ 25gf per pin at 1.0mm stroke

(力:下压1.0mm的力:140 $\pm$ 25gf)

Total stroke(总行程): 1.40mm

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/ √			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL		HT TR	—
DWN	APVD		
QIN			
CHK	REL	Top-Link Electronics Ltd.	
NAME POGO CONNECTOR 3 POSITIONS RIGHT ANGLE			
PGC-144-6.1-RA-3P-3.0PH			
SCALE	A4	DWG NO.	C-100574
1:1		SHEET 1 OF 1	REV A