
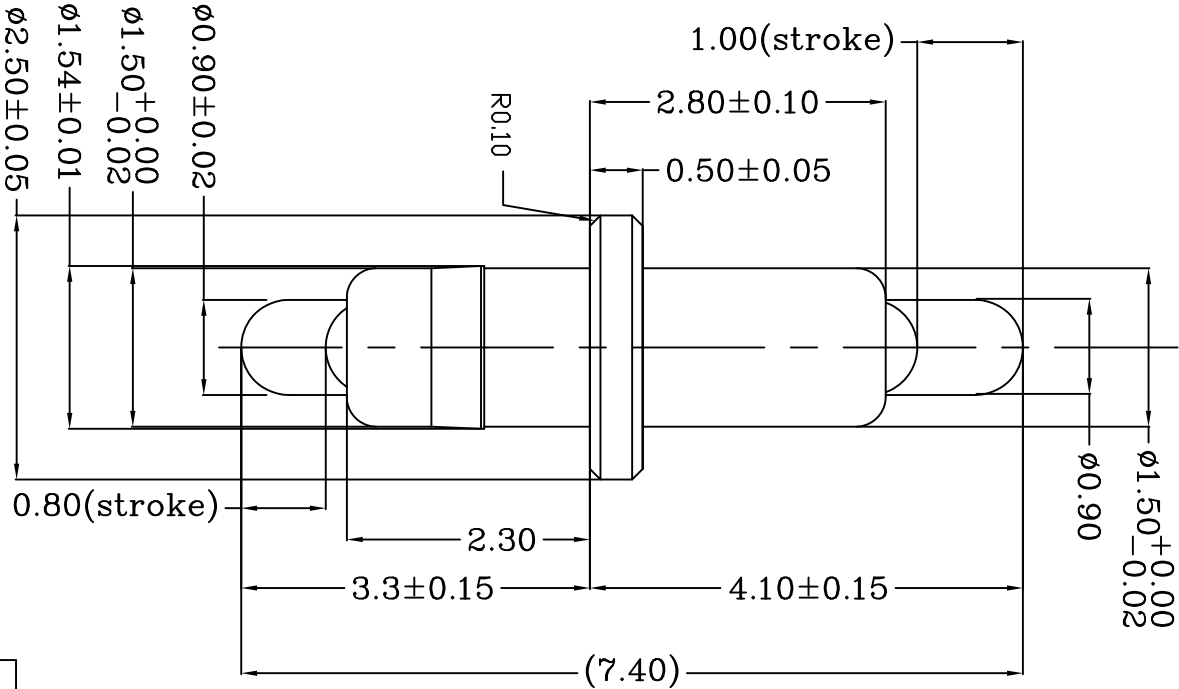




Notes:
Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: Min. 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min. 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1)Force: 150±35gf per pin at 1.8mm stroke (力: 下压1.8mm 的力: 150±35gf)
 - 2)Total stroke(总行程) : 1.2&1.0 mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
 - 1)Contact resistance(接触阻抗): 30mOhm Max.
 - 2)Voltage Rating(额定电压): 36V DC Max
 - 3)Current Rating(额定电流): 2.0A

LDC
-
DIST
-

更新			11/03/08
NEW			09/03/02
REVISION	APVD	DATE	
RECORD			

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-	0.0	= ±0.15	0.00	= ±0.10	0.000	= ±
SURF. TEXTURE: 32/				ANGLE: ±1°			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				DO NOT SCALE PRINT			
NAME		PGGD PIN		SCALE		1:1	
PGGD PIN		PGGD PIN		A4		A4	
PGGD PIN		PGGD PIN		NO.		C-101339	
PGGD PIN		PGGD PIN		SHEET		1 OF 1	
PGGD PIN		PGGD PIN		REV		A1	

101339-1
PART NUMBER

USED ON

-