


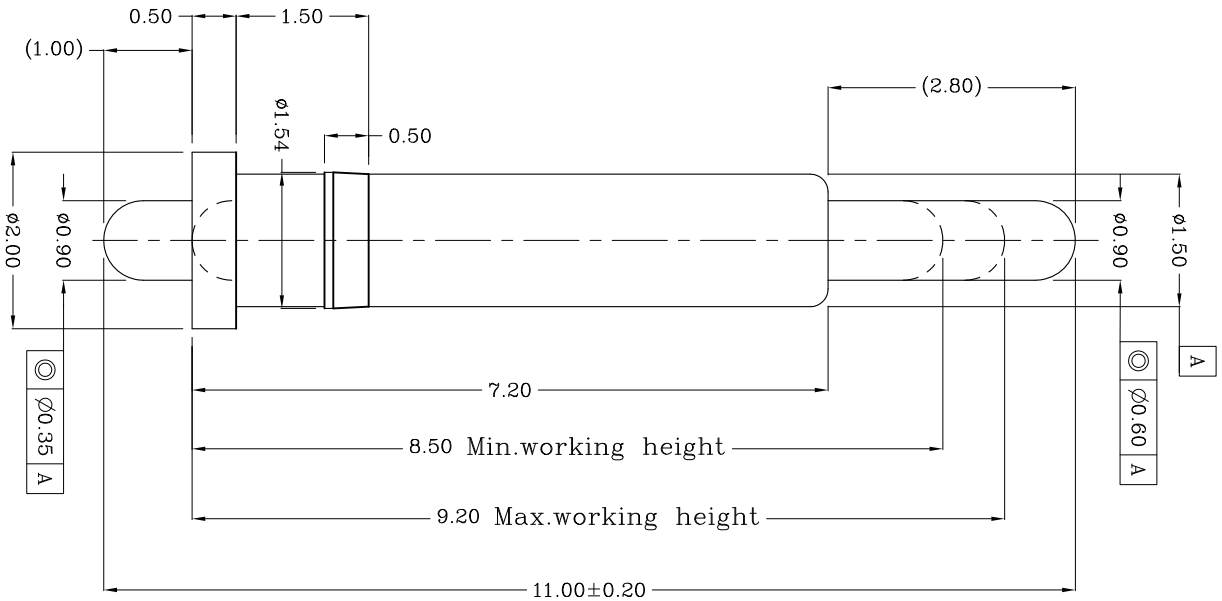

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Electrical performance
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	2	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance			
Max.working height	9.20mm	80gf min<2.1>	
Min.working height	8.50mm	200gf max	
Durability	10000cycle		

DIST

2	UPDATE	2013/06/11
1	NEW	2012/03/07
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.	Type Customer drawing	Unit mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN: Gui zhiguo	APVD:	
0.00 = ±0.15 0.00 = ±0.10 0.000 = ±0.005	CHK:	REL:	
Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.	Name POGO PIN	Scale 1:1	Size A4
		DWG No.	C-101595
		Page 1/1	Rev. 2

101595-1	PART NUMBER
----------	-------------