
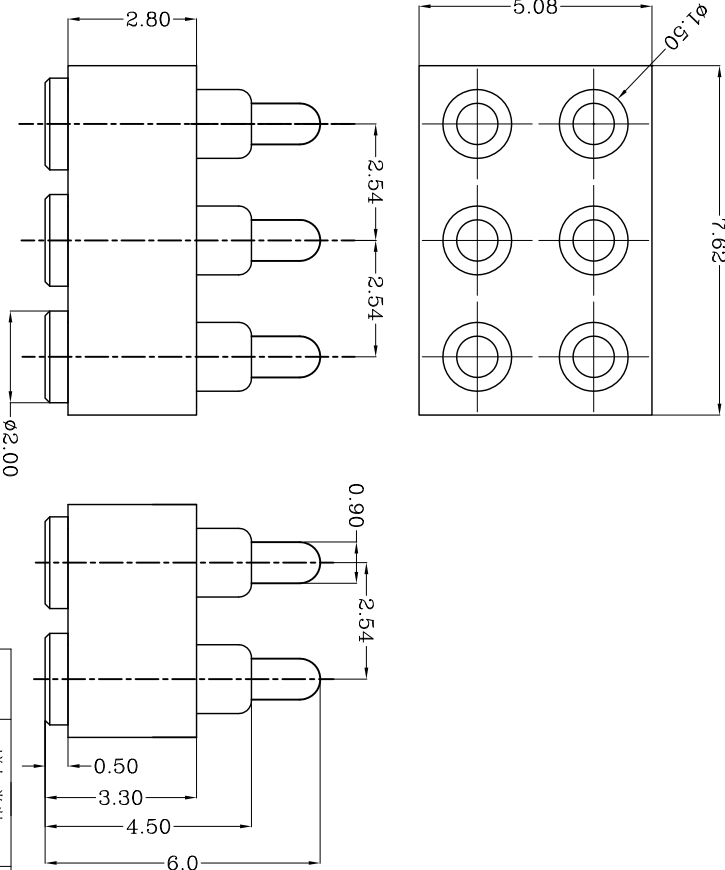


DWG NO.
C-100677

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

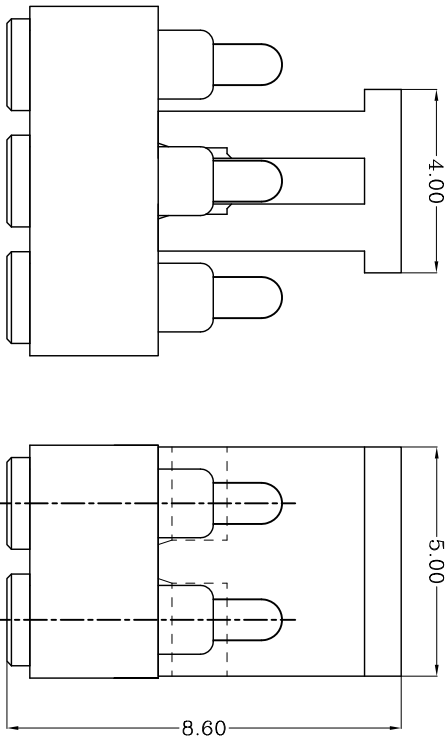

Notes:
1 Material(材质):
Housing: PA 46 (30% Glass Filled) Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:
Body: 镀金0.1um Min 镀底1.4um Min
Plunger: 镀金0.4um Min 镀底1.4um Min

3 Mechanical:
Force: 90gf min per pin at 1.0mm stroke
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能):
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

TOP-LINK

USED ON
-

100677-6

PART NUMBER

MATL	HT TR	FIN
	—	

Top-Link
Electronics Ltd.

NAME	PGGD	CONNECTOR 6 POSITIONS
------	------	-----------------------

PGC-1.5-6.0-2R-6P-2.54PH

SCALE	A4	DWG NO.	C-100677	SHEET 1 OF 1	REV 2
1:1	A4	NO.	C-100677	1 OF 1	2

REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT

SURF TEXTURE: 32/

ANGLE: ±1°

0.000 = ±

0.00 = ±0.10

0.0 = ±0.15

0 = ±

TOLERANCES UNLESS OTHER SPECIFIED

DIMENSIONS IN MM

REVISION RECORD

NEW

增加卷装

DATE

8011/02/10

APVD

REVISION RECORD

NEW

增加卷装

DATE

8011/02/10

4

3

2

1